










- 4646**  DICHROIC
12V 50W GU5,3 
- 4647**  DICHROIC
230V 50W GU10  
- 4647**  COMPACT REFLECTOR
230V 7W GU10  

5099 Βάση κυτή αλουμινίου στρογγυλή για τοποθέτηση στο έδαφος ύψους 160mm
Die cast aluminum round base for placement in the ground with height 160mm









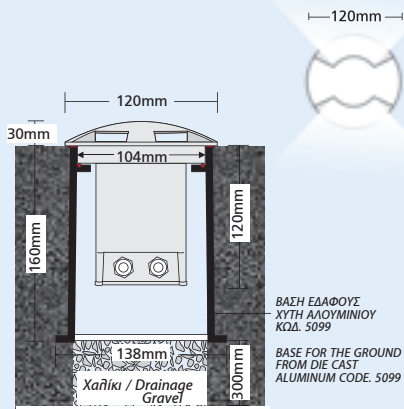

- ▶ χυτό αλουμινίου
- ▶ 2 εξόδων φωτισμού
- ▶ με υπερψωμένο υάλινο προφυλακτήρα tempered για καλύτερη απόδοση φωτισμού
- ▶ με βίδες inox
- ▶ και ελαστικά στεγανοποίησης από σιλικόνη
- ▶ με 1 ή 2 στιπιοθλίπτες PG9 IP68 για την είσοδο και έξοδο καλωδίων παροχής ρεύματος
- ▶ και ενσωματωμένο κουτί διακλάδωσης καλωδίων.
- ▶ Προσφέρεται με βάση εδάφους κυτή αλουμινίου ΚΩΔ. 5099.


- ▶ Waterproof ground buried fitting from die cast aluminum
- ▶ with 2 lighting exits
- ▶ with extolled tempered glass for better lighting performance
- ▶ with inox screws, silicon gaskets
- ▶ with 1 or 2 cable glands PG9 IP68 for input and output of supply cables
- ▶ and incorporated connection box.
- ▶ Available with die cast aluminum base for the ground CODE 5099.

FAROS 1 GAIA/2W



- 4648**  DICHROIC
12V 50W GU5,3 
- 4649**  DICHROIC
230V 50W GU10  
- 4649**  COMPACT REFLECTOR
230V 7W GU10  

5099 Βάση κυτή αλουμινίου στρογγυλή για τοποθέτηση στο έδαφος ύψους 160mm
Die cast aluminum round base for placement in the ground with height 160mm

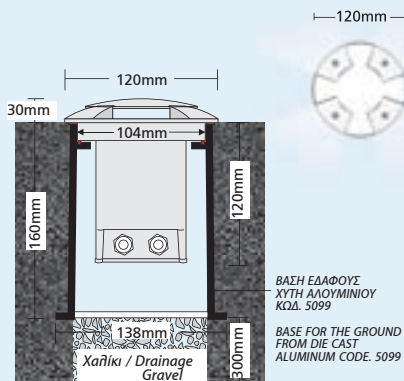

- ▶ Στεγανό φωτιστικό εδάφους
- ▶ χυτό αλουμινίου
- ▶ 4 εξόδων φωτισμού
- ▶ με υπερψωμένο υάλινο προφυλακτήρα tempered για καλύτερη απόδοση φωτισμού
- ▶ με βίδες inox
- ▶ και ελαστικά στεγανοποίησης από σιλικόνη
- ▶ με 1 ή 2 στιπιοθλίπτες PG9 IP68 για την είσοδο και έξοδο καλωδίων παροχής ρεύματος
- ▶ και ενσωματωμένο κουτί διακλάδωσης καλωδίων.
- ▶ Προσφέρεται με βάση εδάφους κυτή αλουμινίου ΚΩΔ. 5099.

- ▶ Waterproof ground buried fitting
- ▶ from die cast aluminum
- ▶ with 4 lighting exits
- ▶ with extolled tempered glass for better lighting performance
- ▶ with inox screws, silicon gaskets
- ▶ with 1 or 2 cable glands PG9 IP68 for input and output of supply cables
- ▶ and incorporated connection box.
- ▶ Available with die cast aluminum base for the ground CODE 5099.

FAROS 1 GAIA/4W

