



SIMPLE LINE I

8077	LUMILUX-FH T5 230V 2x14W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E1 /DRAWING E1
8078	LUMILUX-FH T5 230V 2x21W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E2 /DRAWING E2
8079	LUMILUX-FH T5 230V 2x28W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E3 /DRAWING E3
8080	LUMILUX-FQ T5 230V 2x24W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E1 /DRAWING E1
8081	LUMILUX-FQ T5 230V 2x39W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E2 /DRAWING E2
8082	LUMILUX-FQ T5 230V 2x54W G5 & DICHROIC 230V 2x50W Gu10	◇ ⊕	ΣΧΕΔΙΟ E3 /DRAWING E3

ΣΧΕΔΙΟ E1 /DRAWING E1  825x105mm \updownarrow 70mm  

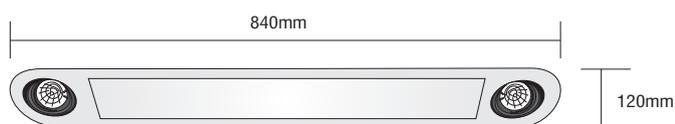

ΣΧΕΔΙΟ E2 /DRAWING E2  1125x105mm \updownarrow 70mm  

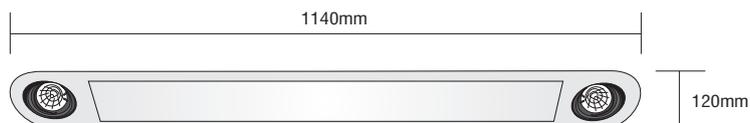

ΣΧΕΔΙΟ E1 /DRAWING E1  1425x105mm \updownarrow 70mm  



- ▶ Διακοσμητικό φωτιστικό κωνευτό οροφής
- ▶ εσωτερικού χώρου
- ▶ για λυχνία T5 FH ή FQ
- ▶ από χυτό προφίλ αλουμινίου
- ▶ με πλαστικό κάλυμμα ματ (σατινέ)
- ▶ και 2 σποτ κινητά χυτά αλουμινίου
- ▶ με ελατήρια στηρίξεως στην οροφή
- ▶ με ενσωματωμένο σύστημα έναυσης
- ▶ με ηλεκτρονικό μετ/στη
- ▶ κατάλληλο για φωτισμό γραφείων, καταστημάτων.

- ▶ Decorative ceiling recessed fitting
- ▶ for indoors use
- ▶ suitable for one lamp T5 FH or FQ
- ▶ with high quality plastic cover mat (satin)
- ▶ with heavy duty clips for support on the ceiling
- ▶ with 2 die cast aluminum movable spots
- ▶ from die cast aluminum profile
- ▶ with incorporated control gear
- ▶ with electronic ballast
- ▶ suitable for use at offices, shops.

393