





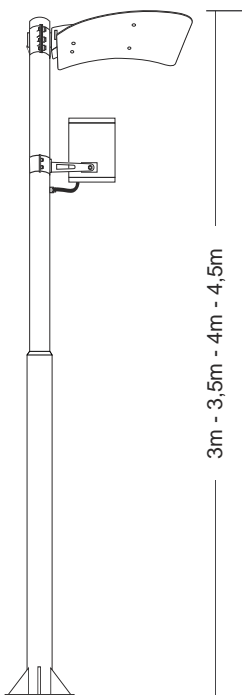


## TOWER 5.2



- ▶  $\mu$   $\mu$  133mm
- ▶  $\mu$  4mm  $\mu$
- ▶  $\mu$  1  $\mu$
- ▶  $\mu$  1  $\mu\mu$   $\mu$  Ip65
- ▶  $\mu$   $\mu$   $\mu$  HQI 70-150W
- ▶  $\mu$   $\mu$   $\mu$  HQI 70-150W

**26000**  HQI-T 230V  
1x70W G12 

**26001**  HQI-T 230V  
1x150W G12 



- ▶ Waterproof fitting outdoors use
- ▶ with pressed steel pillar of 133mm external diameter with thickness 4mm
- ▶ with 1 external aluminium reflector for indirect lighting
- ▶ with 1 waterproof projector suitable for HQI lamps 70-150W
- ▶ with incorporated gear box HQI 70-150W for use at public places, for external lighting of building roads.

