

Frameless Double Move 1



- Φωτιστικό διπλό χωνευτό led spot οροφής
- χωρίς εξωτερικό πλαίσιο
- frameless/trimless
- εσωτερικού χώρου
- αλουμινίου
- βαμμένο με ηλεκτροστατική βαφή
- κινητό οριζοντίως $\pm 355^\circ$ και καθέτως $\pm 25^\circ$
- με ενσωματωμένα 2 cob led
- ενσωματωμένα σε ψήκτρες υψηλής απόδοσης
- για την καλύτερη διαχείριση θερμότητας των led
- CRI>80 | 3 SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI 98+
- σε 2700-3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
- με ανακλαστήρες υψηλής απόδοσης
- με δέσμη $15^\circ\text{-}25^\circ\text{-}40^\circ\text{-}60^\circ$
- λειτουργεί με συνοδευτικό led driver
- On/off ή dimmable phase cut / Dali / 1-10volt

- Recessed double led spotlight
- for indoors use
- frameless/trimless
- from die cast aluminum
- painted with electrostatic powder
- movable horizontally $\pm 355^\circ$ and vertically $\pm 25^\circ$
- with incorporated 2 cob led sources
- adjusted on high performance heatsinks
- for best thermal management of led sources
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90 & CRI 98+
- upon request available with 2 SDCM
- in 2700-3000-4000 Kelvin
- upon request in 3500-5000-6500 Kelvin
- with high performance reflector
- available $15^\circ\text{-}25^\circ\text{-}40^\circ\text{-}60^\circ$ beam angle
- works with remote led driver
- On/off, dimmable phase cut/Dali/1-10volt

CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

35057 [2x5.0W | 220-240v | 2700-3000-4000 KELVIN | 2x(440-460-480) LUMEN]



35058 [2x6.7W | 220-240v | 2700-3000-4000 KELVIN | 2x(585-615-640) LUMEN]



35059 [2x7.5W | 220-240v | 2700-3000-4000 KELVIN | 2x(645-675-705) LUMEN]



35060 [2x9.0W | 220-240v | 2700-3000-4000 KELVIN | 2x(780-820-860) LUMEN]



Total depth 115mm

Installation depth 100mm



New Versions

40282 [2x11.0W | 220-240v | 2700-3000-4000 KELVIN | 2x(925-965-1000) LUMEN]



40283 [2x12.75W | 220-240v | 2700-3000-4000 KELVIN | 2x(1050-1100-1150) LUMEN]



Total depth 145mm

Installation depth 130mm



Accessories upon request




Smooth light filter 1

Smooth light filter 2


Honey comb louvre

Ρυθμιζόμενα πλαϊνά στηρίγματα για οροφές πάχους από 10mm έως 30mm

Adjustable side brackets for installation onto ceiling with thickness from 10mm up to 30mm




Tiltable

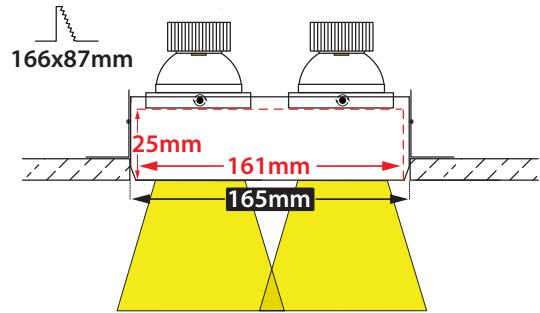

Kινητό οριζοντίως $\pm 355^\circ$ και καθέτως $\pm 25^\circ$

Movable horizontally $\pm 355^\circ$ and vertically $\pm 25^\circ$

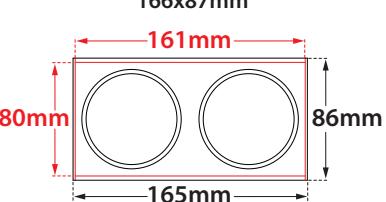

01

02

18

Βαμμένα με Ηλεκτροστατική Βαφή
Painted with Electrostatic Powder



Διαθέσιμο και σε άλλα χρώματα κατόπιν παραγγελίας
Upon request available in different color finishes



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγείτε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο
LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin

warm white 3000 Kelvin

neutral white 4000 Kelvin