

Linear Round 2




- Γραμμικό LED φωτιστικό εξωτερικό εσωτερικού χώρου
 - κατάλληλο για τοποθέτηση σε οροφή ή κρεμαστό με κιτ ανάρτησης*
 - από προφίλ αλουμινίου
 - με πολυκαρμπονικό κάλυμμα σατινέ
 - με ενσωματωμένο Linear Led Engine (LLE)
 - τοποθετημένα σε γραμμική ψήκτρα για καλύτερη διαχείριση της θερμοκρασίας σε θερμοκρασία χρώματος 3000K - 4000K
 - κατόπιν παραγγελίας και σε 2700-5000-6500 Kelvin
 - CRI>80 | 3SDCM στη βασική έκδοση
 - με ενσωματωμένο LED driver on/off
 - κατόπιν παραγγελίας dimmable phase cut/Dali/1-10v
 - κατάλληλο για ομοιογενή φωτισμό χωρίς κενά
- Linear LED fitting
 - surface mounted or suspended with suspension kit*
 - for indoors use
 - from extruded aluminum powder coated
 - with polycarbonate satin cover
 - with incorporated Linear Led Engine (LLE)
 - CRI>80 | 3SDCM as standard
 - Upon request available with CRI>90 adjusted on a linear cooling system
 - for best heat management
 - in 3000K or 4000K color temperature
 - upon request also available in 2700-5000K-6500K
 - with incorporated LED driver on/off as standard
 - upon request dimmable phase cut/Dali/1-10v
 - seamless effect without shadows between modules

CODE	LENGTH* mm	VERSION 1			VERSION 2			VERSION 3		
		POWER WATT	FINAL LUMEN OUTPUT 3000K	FINAL LUMEN OUTPUT 4000K	POWER WATT	FINAL LUMEN OUTPUT 3000K	FINAL LUMEN OUTPUT 4000K	POWER WATT	FINAL LUMEN OUTPUT 3000K	FINAL LUMEN OUTPUT 4000K
34651	295	8.8	735	775	10.5	882	930	12.2	1023	1079
34652	365	10.5	882	930	12.6	1058	1116	14.7	1228	1295
34653	435	12.3	1029	1085	14.7	1235	1302	17.1	1432	1510
34654	505	14.0	1176	1240	16.8	1411	1488	19.5	1637	1726
34655	575	15.8	1323	1395	19.0	1588	1674	22.0	1842	1942
34656	645	17.6	1470	1550	21.1	1764	1860	24.4	2046	2158
34657	715	19.3	1617	1705	23.2	1940	2046	26.9	2251	2373
34658	785	21.1	1764	1860	25.3	2117	2232	29.3	2455	2589
34659	855	22.8	1911	2015	27.4	2293	2418	31.8	2660	2805
34660	925	24.6	2058	2170	29.5	2470	2604	34.2	2865	3021
34661	995	26.3	2205	2325	31.6	2646	2790	36.6	3069	3236
34662	1065	28.1	2352	2480	33.7	2822	2976	39.1	3274	3452
34663	1135	29.8	2499	2635	35.8	2999	3162	41.5	3479	3668
34664	1205	31.6	2646	2790	37.9	3175	3348	44.0	3683	3884
34665	1275	33.3	2793	2945	40.0	3352	3534	46.4	3888	4099
34666	1345	35.1	2940	3100	42.1	3528	3720	48.9	4092	4315
34667	1415	36.9	3087	3255	44.2	3704	3906	51.3	4297	4531
34668	1485	38.6	3234	3410	46.3	3881	4092	53.7	4502	4747
34669	1555	40.4	3381	3565	48.4	4057	4278	56.2	4706	4962
34670	1625	42.1	3528	3720	50.5	4234	4464	58.6	4911	5178
34671	1695	43.9	3675	3875	52.7	4410	4650	61.1	5116	5394
34672	1765	45.6	3822	4030	54.8	4586	4836	63.5	5320	5610
34673	1835	47.4	3969	4185	56.9	4763	5022	66.0	5525	5826
34674	1905	49.1	4116	4340	59.0	4939	5208	68.4	5729	6041
34675	1975	50.9	4263	4495	61.1	5116	5394	70.8	5934	6257
34676	2045	52.7	4410	4650	63.2	5292	5580	73.3	6139	6473
34677	2115	54.4	4557	4805	65.3	5468	5766	75.7	6343	6689
34678	2185	56.2	4704	4960	67.4	5645	5952	78.2	6548	6904
34679	2255	57.9	4851	5115	69.5	5821	6138	80.6	6753	7120
34680	2325	59.7	4998	5270	71.6	5998	6324	83.1	6957	7336
34681	2395	61.4	5145	5425	73.7	6174	6510	85.5	7162	7552
34682	2465	63.2	5292	5580	75.8	6350	6696	87.9	7366	7767
34683	2535	64.9	5439	5735	77.9	6527	6882	90.4	7571	7983
34684	2605	66.7	5586	5890	80.0	6703	7068	92.8	7776	8199
34685	2675	68.4	5733	6045	82.1	6880	7254	95.3	7980	8415
34686	2745	70.2	5880	6200	84.2	7056	7440	97.7	8185	8630
34687	2815	72.0	6027	6355	86.3	7232	7626	100.2	8390	8846
34688	2885	73.7	6174	6510	88.5	7409	7812	102.6	8594	9062
34689	2955	75.5	6321	6665	90.6	7585	7998	105.0	8799	9278
34690	3025	77.2	6468	6820	92.7	7762	8184	107.5	9003	9493
34691	3095	79.0	6615	6975	94.8	7938	8370	109.9	9208	9709
34692	3165	80.7	6762	7130	96.9	8114	8556	112.4	9413	9925
34693	3235	82.5	6909	7285	99.0	8291	8742	114.8	9617	10141
34694	3305	84.2	7056	7440	101.1	8467	8928	117.3	9822	10356
34695	3375	86.0	7203	7595	103.2	8644	9114	119.7	10027	10572
34696	3445	87.8	7350	7750	105.3	8820	9300	122.1	10231	10788
34697	3515	89.5	7497	7905	107.4	8996	9486	124.6	10436	11004
34698	3585	91.3	7644	8060	109.5	9173	9672	127.0	10640	11220
34699	3655	93.0	7791	8215	111.6	9349	9858	129.5	10845	11435
34700	3725	94.8	7938	8370	113.7	9526	10044	131.9	11050	11651
34701	3795	96.5	8085	8525	115.8	9702	10230	134.4	11254	11867
34702	3865	98.3	8232	8680	117.9	9878	10416	136.8	11459	12083
34703	3935	100.0	8379	8835	120.0	10055	10602	139.2	11664	12298
34704	4005	101.8	8526	8990	122.1	10231	10788	141.7	11868	12514
34705	4075	103.5	8673	9145	124.3	10408	10974	144.1	12073	12730
34706	4145	105.3	8820	9300	126.4	10584	11160	146.6	12277	12946
34707	4215	107.1	8967	9455	128.5	10760	11346	149.0	12482	13161
34708	4285	108.8	9114	9610	130.6	10937	11532	151.5	12687	13377
34709	4355	110.6	9261	9765	132.7	11113	11718	153.9	12891	13593
34710	4425	112.3	9408	9920	134.8	11290	11904	156.3	13096	13809

SUSPENSION KIT

Composed by 2-5 pcs (depending from the length of luminaire) of steel wire with length 1.20m standard length (upon request available in longer lengths) assembled to fitting with all necessary components for ceiling installation, with 1.50m long power supply cable 3x0.75mm transparent-white-black-grey (upon request available in longer lengths), connected to fitting, and 1 pcs of round die cast aluminum ceiling base, painted in same color with luminaire, with external diameter d=60mm and height=20mm.

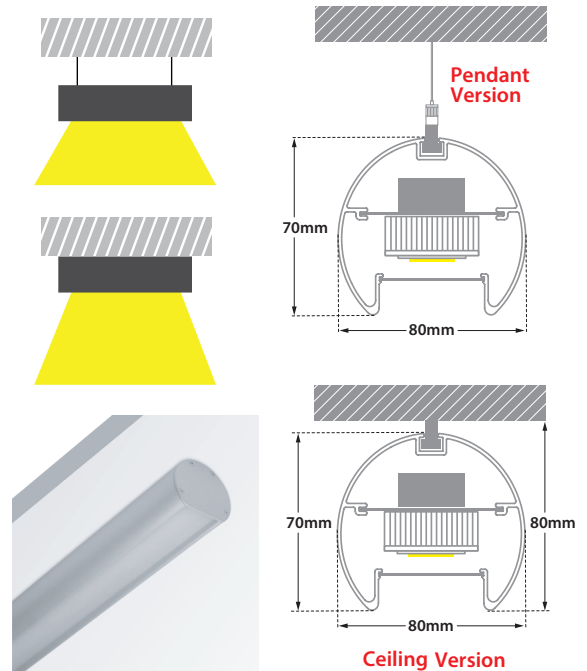

*Το φωτιστικό είναι διαθέσιμο μέχρι και 4500mm με ενιαίο σώμα και ενιαίο κάλυμμα

*Luminaire is offered up to 4500mm in one single piece of body and cover

Linear Led Engine/Module



01 02 18

Διαθέσιμο και σε άλλα χρώματα κατόπιν παραγγελίας
Upon request available
in different color finishes



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο
LED technology changes constantly forward, so before selecting / ordering the most suitable product for you,
ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin