

Multiline 2 Double Move Cob Led




- > Φωτιστικό χωνευτό οροφής
- > εσωτερικού χώρου
- > με στεφάνι αλουμινίου
- > με ενσωματωμένα 2 σποτ αλουμινίου
- > κινητά οριζοντίως ±35° και καθέτως ±35°
- > με ενσωματωμένο 2 COB LED ισχύος
- > CRI>80 | 3 SDCM
- > κατόπιν παραγγελίας με CRI>90 & CRI 98+
- > σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
- > κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
- > με ανακλαστήρα υψηλής απόδοσης
- > με δέσμη 15°-25°-40°-60°
- > με ενσωματωμένη ψήκτρα υψηλής απόδοσης
- > για την καλύτερη διαχείριση θερμότητας του led
- > λειτουργεί με συνοδευτικό led driver
- > On/off ή dimmable phase cut / Dali / 1-10volt

- > Recessed double spotlight
- > for indoors use
- > with aluminum frame
- > and 2 die cast aluminum spotlights
- > movable horizontally ±35° and vertically ±35°
- > with incorporated 2 COB Leds
- > CRI>80 | 3 SDCM | as standard
- > upon request, available with CRI>90 & CRI 98+
- > in 2700-3000-4000 Kelvin
- > upon request in 3500-5000-6500 Kelvin
- > with high performance reflector
- > with high performance heatsink
- > for best thermal management
- > available with 15°-25°-40°-60° beam
- > works with remote led driver
- > on/off, dimmable phase cut/Dali/1-10volt

INDICATIVE COB LED TABLE* CRI>80


22148	24W	2x12.0W	230-240v	2700-3000-4000 KELVIN	2x(1200-1270-1340) LUMEN	◊ II	△ E
22149	35W	2x17.5W	230-240v	2700-3000-4000 KELVIN	2x(1665-1765-1860) LUMEN	◊ II	△ E
22150	42W	2x21.0W	230-240v	2700-3000-4000 KELVIN	2x(1960-2080-2190) LUMEN	◊ II	△ E
22151	50W	2x25.0W	230-240v	2700-3000-4000 KELVIN	2x(2240-2380-2500) LUMEN	◊ III	△ E
22152	56W	2x28.0W	230-240v	2700-3000-4000 KELVIN	2x(2680-2780-2850) LUMEN	◊ II	△ E
22153	64W	2x32.0W	230-240v	2700-3000-4000 KELVIN	2x(3025-3150-3265) LUMEN	◊ II	△ E
22192	76W	2x38.0W	230-240v	2700-3000-4000 KELVIN	2x(3500-3600-3750) LUMEN	◊ II	△ E
22193	84W	2x42.0W	230-240v	2700-3000-4000 KELVIN	2x(4085-4245-4383) LUMEN	◊ II	△ E
22194	100W	2x50.0W	230-240v	2700-3000-4000 KELVIN	2x(4785-4975-5142) LUMEN	◊ II	△ E
22195	106W	2x53.0W	230-240v	2700-3000-4000 KELVIN	2x(4981-5200-5380) LUMEN	◊ II	△ E



Κινητό ±35° οριζοντίως και ±35° καθέτως

Movable ±35° horizontally and ±35° vertically

□ 345x181mm ✎ 323x165mm ⬆️ 125-185mm CE IP20

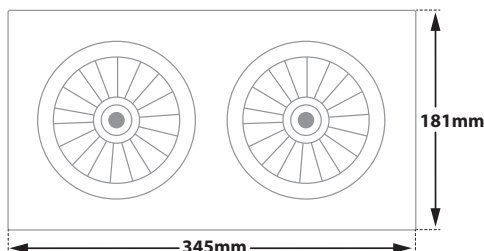

Accessories upon request



Smooth light filter 1

Smooth light filter 2

Honey comb louvre