


Technoline 6

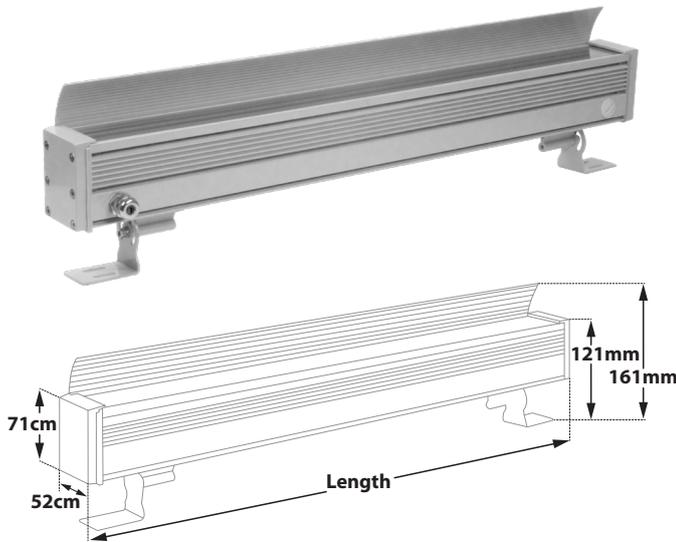

- Linear led lighting fitting
- wall-ceiling-floor mounted
- with anti-glare flap
- waterproof suitable for exteriors use
- from extruded aluminum powder coated
- polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM |as standard
- Upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with symmetric lenses 10°-15°-25°-35°-45°-60°*
- or elliptical beam lenses 15°x35° , 20x60°*
- or wall washing lenses
- works with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PGII IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene with length 1m
- or with male and female fis fast connection with IP67 protection
- suitable for exterior lighting of building facades, windows

i *due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.

CRI 80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

Version 1


23426		7.0W	7x1.0W	220-240v	2700-3000-4000 KELVIN	560-595-630 LUMEN	LENGTH=315mm	
23427		14.0W	14x1.0W	220-240v	2700-3000-4000 KELVIN	1120-1190-1260 LUMEN	LENGTH=615mm	
23428		21.0W	21x1.0W	220-240v	2700-3000-4000 KELVIN	1680-1785-1890 LUMEN	LENGTH=915mm	
23429		28.0W	28x1.0W	220-240v	2700-3000-4000 KELVIN	2240-2380-2520 LUMEN	LENGTH=1215mm	
23430		35.0W	35x1.0W	220-240v	2700-3000-4000 KELVIN	2800-2975-3150 LUMEN	LENGTH=1515mm	

Version 2


23431		10.5W	7x1.5W	220-240v	2700-3000-4000 KELVIN	805-840-875 LUMEN	LENGTH=315mm	
23432		21.0W	14x1.5W	220-240v	2700-3000-4000 KELVIN	1610-1680-1750 LUMEN	LENGTH=615mm	
23433		31.5W	21x1.5W	220-240v	2700-3000-4000 KELVIN	2415-2520-2625 LUMEN	LENGTH=915mm	
23434		42.0W	28x1.5W	220-240v	2700-3000-4000 KELVIN	3220-3360-3500 LUMEN	LENGTH=1215mm	
23435		52.5W	35x1.5W	220-240v	2700-3000-4000 KELVIN	4025-4200-4375 LUMEN	LENGTH=1515mm	

GLASS (5mm)

CE IP65

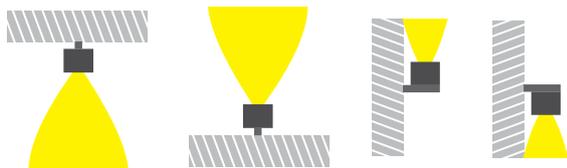

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

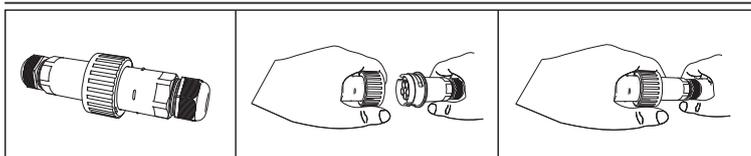

Standard color 18

Available colors upon request 01 02

i LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin