



- Linear led lighting fitting
- wall-ceiling-floor mounted
- waterproof suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with symmetric lenses 11°-15°-24°-28°-32°-41°-48°-63°
- or elliptical beam lenses 15°x35° , 22°x37°
- work with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

**CRI >80 | System power & Luminaire Flux at 28°**

**For information regarding other beam angles use the table factors for lumen output**


Version 1

<b>23426</b>		8.4W   7x1.20W	220-240V	2700-3000-4000 KELVIN	775-816-863 LUMEN	<b>LENGTH=315mm</b>	
<b>23427</b>		16.8W   14x1.20W	220-240V	2700-3000-4000 KELVIN	1550-1632-1726 LUMEN	<b>LENGTH=615mm</b>	
<b>23428</b>		25.2W   21x1.20W	220-240V	2700-3000-4000 KELVIN	2325-2448-2589 LUMEN	<b>LENGTH=915mm</b>	
<b>23429</b>		33.6W   28x1.20W	220-240V	2700-3000-4000 KELVIN	3100-3264-3452 LUMEN	<b>LENGTH=1215mm</b>	
<b>23430</b>		42.0W   35x1.20W	220-240V	2700-3000-4000 KELVIN	3875-4080-4315 LUMEN	<b>LENGTH=1515mm</b>	

GLASS (5mm)

CE

Beam angle	Factor
11°	0.86
15°	0.97
24°	0.96
<b>28°</b>	<b>1.00</b>
32°	0.86
41°	0.91
48°	0.89
63°	0.88
15°x35°	0.93
22°x37°	0.82

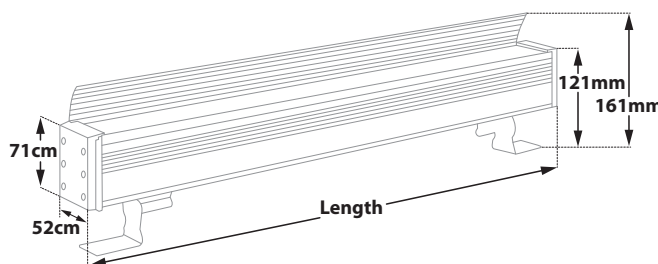

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

