


## Multiline 2 Single Move Cob Led

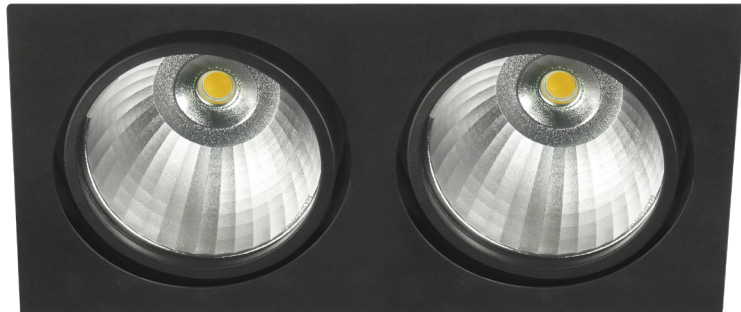

- > Φωτιστικό χωνευτό οροφής
  - > εσωτερικού χώρου
  - > με στεφάνι αλουμινίου
  - > με ενσωματωμένα 2 σποτ αλουμινίου
  - > κινητά οριζοντίως ±35° ή καθέτως ±35°
  - > με ενσωματωμένο 2 COB LED ισχύος
  - > με ενσωματωμένα ψήκτρα υψηλής απόδοσης
  - > για την καλύτερη διαχείριση θερμότητας του led
  - > CRI>80 | 3 SDCM
  - > κατόπιν παραγγελίας με CRI>90 & CRI 98+
  - > σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
  - > κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
  - > με ανακλαστήρα υψηλής απόδοσης
  - > με δέσμη 15°-25°-40°-60°
  - > λειτουργεί με συνοδευτικό led driver
  - > On/off ή dimmable phase cut / Dali / 1-10volt
- 
- > Recessed double spotlight
  - > for indoors use
  - > with aluminum frame
  - > and 2 die cast aluminum spotlights
  - > movable horizontally ±35° or vertically ±35°
  - > with incorporated 2 COB Leds
  - > with high performance heatsink
  - > for best thermal management
  - > CRI>80 | 3 SDCM | as standard
  - > upon request, available with CRI>90 & CRI 98+
  - > in 2700-3000-4000 Kelvin
  - > upon request in 3500-5000-6500 Kelvin
  - > with high performance reflector
  - > available with 15°-25°-40°-60° beam
  - > works with remote led driver
  - > on/off, dimmable phase cut/Dali/1-10volt

### INDICATIVE COB LED TABLE\* CRI>80


35227	24W	2x12.0W	230-240v	2700-3000-4000 KELVIN	2x(1200-1270-1340) LUMEN	⊕ ⊖
35228	35W	2x17.5W	230-240v	2700-3000-4000 KELVIN	2x(1665-1765-1860) LUMEN	⊕ ⊖
35229	42W	2x21.0W	230-240v	2700-3000-4000 KELVIN	2x(1960-2080-2190) LUMEN	⊕ ⊖
35230	50W	2x25.0W	230-240v	2700-3000-4000 KELVIN	2x(2240-2380-2500) LUMEN	⊕ ⊖
35231	56W	2x28.0W	230-240v	2700-3000-4000 KELVIN	2x(2680-2780-2850) LUMEN	⊕ ⊖
35232	64W	2x32.0W	230-240v	2700-3000-4000 KELVIN	2x(3025-3150-3265) LUMEN	⊕ ⊖
35233	76W	2x38.0W	230-240v	2700-3000-4000 KELVIN	2x(3500-3600-3750) LUMEN	⊕ ⊖
35234	84W	2x42.0W	230-240v	2700-3000-4000 KELVIN	2x(4085-4245-4383) LUMEN	⊕ ⊖
35235	100W	2x50.0W	230-240v	2700-3000-4000 KELVIN	2x(4785-4975-5142) LUMEN	⊕ ⊖
35236	106W	2x53.0W	230-240v	2700-3000-4000 KELVIN	2x(4981-5200-5380) LUMEN	⊕ ⊖

320x157mm

300x140mm

125-185mm

CE IP20



Κινητό ±35° οριζοντίως

Movable ±35° horizontally



\*Κινητό σε άξονα κάθετο στο μήκος του φωτιστικού  
Mobile on an axis vertical to the length of the luminaire

### Accessories upon request



Smooth light filter 1



Smooth light filter 2



Honey comb louvre

