

- Linear led lighting fitting
- wall fixed mounted
- waterproof suitable for exterior use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with symmetric lenses 11°-15°-24°-28°-32°-41°-48°-63°
- or elliptical beam lenses 15°x35° , 22x37°
- work with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows



CRI>80 | System power & Luminaire Flux at 28°

For information regarding other beam angles use the table factors for lumen output


Version 1

23519		8.4W		7x1.20W		220-240V		2700-3000-4000 KELVIN		775-816-863 LUMEN	LENGTH=315mm			
23520		16.8W		14x1.20W		220-240V		2700-3000-4000 KELVIN		1550-1632-1726 LUMEN	LENGTH=615mm			
23521		25.2W		21x1.20W		220-240V		2700-3000-4000 KELVIN		2325-2448-2589 LUMEN	LENGTH=915mm			
23522		33.6W		28x1.20W		220-240V		2700-3000-4000 KELVIN		3100-3264-3452 LUMEN	LENGTH=1215mm			
23523		42.0W		35x1.20W		220-240V		2700-3000-4000 KELVIN		3875-4080-4315 LUMEN	LENGTH=1515mm			

GLASS (5mm)

CE IP65

Beam angle	Factor
11°	0.86
15°	0.97
24°	0.96
28°	1.00
32°	0.86
41°	0.91
48°	0.89
63°	0.88
15°x35°	0.93
22°x37°	0.82

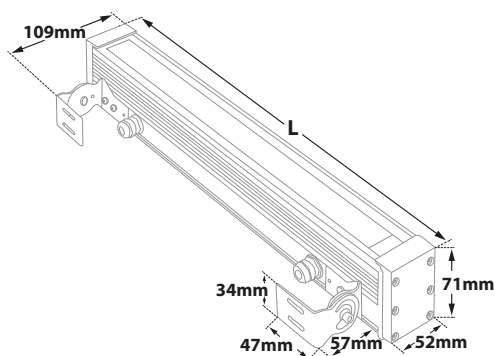

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection



Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin warm white 3000 Kelvin neutral white 4000 Kelvin