


## Frameless Ground Led 1 NV

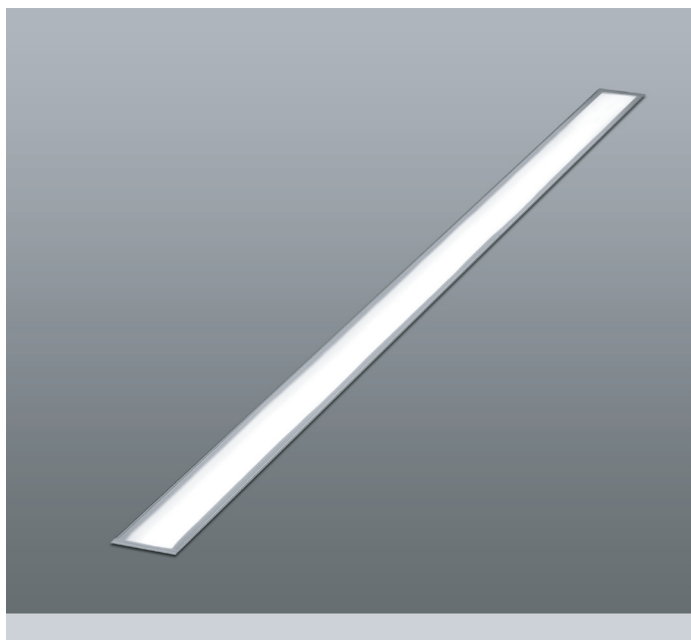




- Linear inground recessed waterproof led luminaire
- frameless/trimless (without external trim)
- suitable for outdoors use
- body made from extruded aluminum polyester powder coated
- ground base made from extruded aluminum polyester powder coated
- with die cast aluminum end caps polyester powder coated
- with tempered opal/mat glass 6mm thick
- with rubber gaskets and stainless-steel screws
- with one or two cable glands IP68
- with pre-connected male and female IP68 fis fast connection
- with incorporated power led smd
- adjusted on a high performance linear heatsink
- for best thermal management of led source
- CRI>80 | available in 2700-3000-4000 Kelvin
- upon request available in 6500 Kelvin
- input voltage 24volt DC as standard
- works with external/remote constant voltage led driver
- upon request available in different lengths

### CRI>80 | Power & Luminous flux


24261		5.5W	24V DC   2700 - 3000 - 4000 KELVIN   214 - 228 - 235 LUMEN   DIM 1   L:305mm		
24262		11.0W	24V DC   2700 - 3000 - 4000 KELVIN   428 - 456 - 470 LUMEN   DIM 2   L:585mm		
24263		16.5W	24V DC   2700 - 3000 - 4000 KELVIN   642 - 684 - 705 LUMEN   DIM 3   L:865mm		
24264		22.0W	24V DC   2700 - 3000 - 4000 KELVIN   857 - 912 - 940 LUMEN   DIM 4   L:1145mm		






ΔΙΑΣΤΑΣΕΙΣ DIMENSIONS			ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	A	B	LENGTH	WIDTH	DEPTH
1	305	313	326	50	85
2	585	593	606	50	85
3	865	873	886	50	85
4	1145	1153	1166	50	85

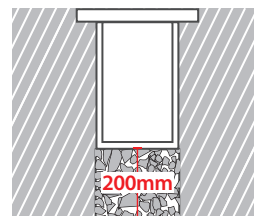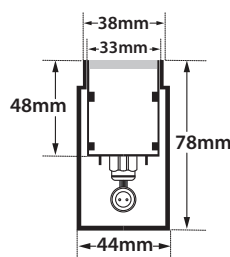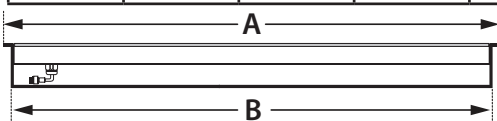

### Suitable for continuous lighting



Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

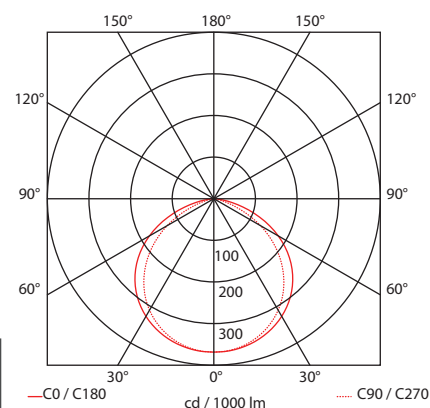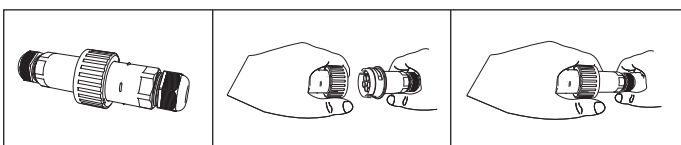

**ΠΡΟΣΟΧΗ:** Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

**WARNING:** In all ground buried lighting fittings installation, at least 20 cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

Standard color 18

Available colors upon request 01 02 30



\*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin