


Frameless Ground Led 2 CV

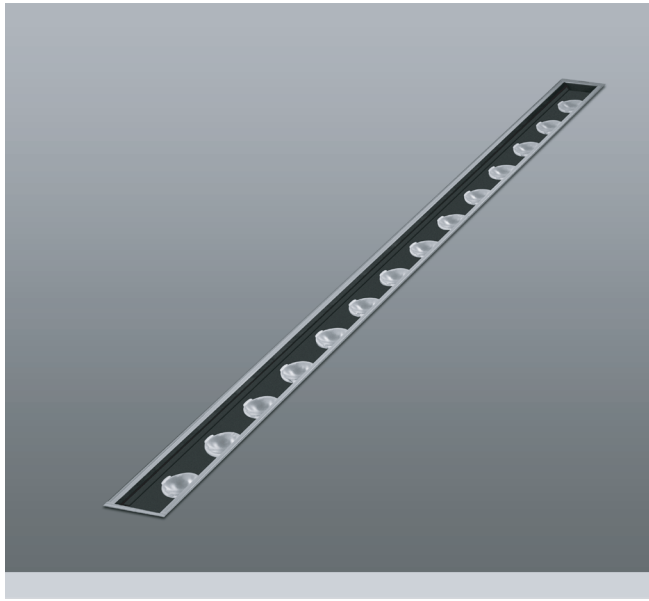

- Linear inground recessed waterproof led luminaire
- frameless/trimless (without external trim)
- suitable for outdoors use
- body made from extruded aluminum polyester powder coated
- ground base made from extruded aluminum polyester powder coated
- with die cast aluminum end caps polyester powder coated
- with heavy duty front frosted/opal polycarbonate diffuser/cover with 4.5mm thickness
- upon request available with tempered opal/mat glass
- with rubber gaskets and stainless-steel screws
- with one or two cable glands IP68
- with pre-connected male and female IP68 fis fast connection
- with incorporated high-power led smd
- adjusted on a high performance linear heatsink for best thermal management of led source
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with symmetric lenses 10°-15°-25°-35°-45°-60°*
- or elliptical beam lenses 15°x35°, 20x40°*
- or wall washing lenses
- input forward voltage 24v DC
- works with external/remote constant voltage led driver
- standard lenght of luminaire 1000mm
- available also in 500mm-1500mm-2000mm length
- upon request available in different lenghts


CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam


30291		7.0W	7x1.0W	24v DC	3000-4000 KELVIN	655-690 LUMEN	DIM (1)	
30292		14.0W	14x1.0W	24v DC	3000-4000 KELVIN	1305-1375 LUMEN	DIM (2)	
30293		21.0W	21x1.0W	24v DC	3000-4000 KELVIN	1955-2060 LUMEN	DIM (3)	
30294		28.0W	28x1.0W	24v DC	3000-4000 KELVIN	2605-2745 LUMEN	DIM (4)	
30295		35.0W	35x1.0W	24v DC	3000-4000 KELVIN	3255-3430 LUMEN	DIM (5)	




DIM	CODE	A	B	ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
				LENGTH	WIDTH	DEPTH
1	30291	305	313	326	50	85
2	30292	585	593	606	50	85
3	30293	865	873	886	50	85
4	30294	1145	1153	1166	50	85
5	30295	1425	1433	1446	50	85

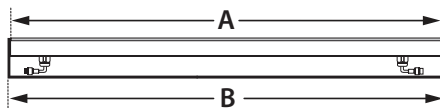






Suitable for continuous lighting



With pre-connected IP68 male and female fis for fast connection

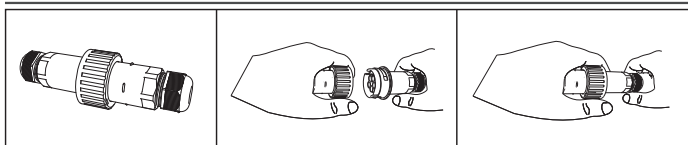

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

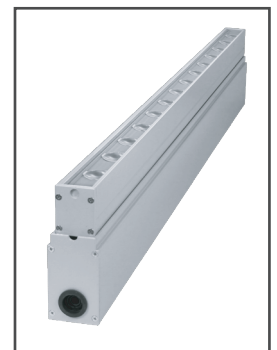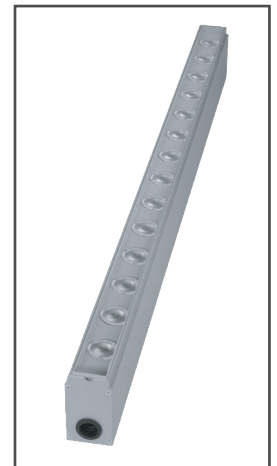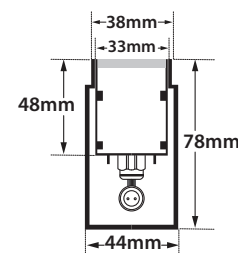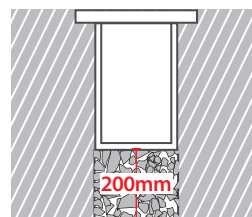

Standard color 18

Available colors upon request

01 02 30



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin