


Technoline 10 Compact High

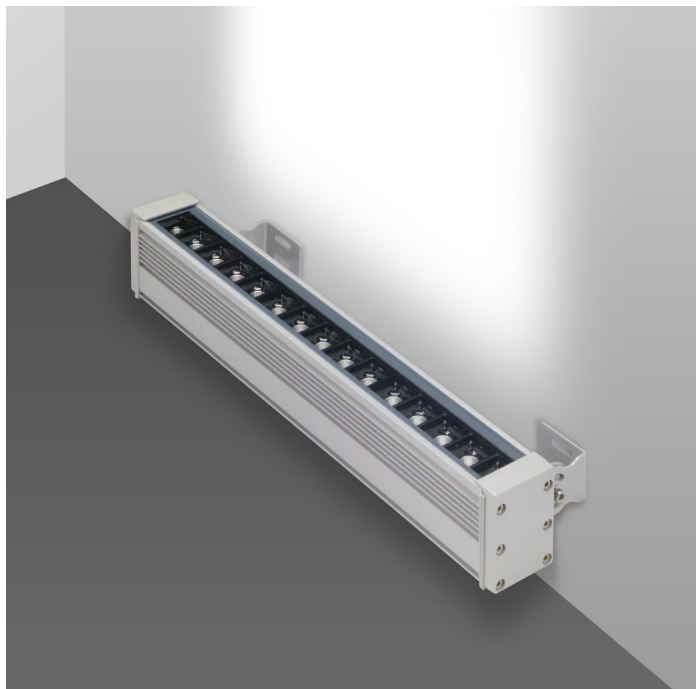

- Linear waterproof led luminaire
- wall fixed mounted
- suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with protective front tempered glass transparent
- with incorporated High Power Led Smd technology
- adjusted inside a special black anti-glare optical screen
- with internal reflectors
- with symmetric angle beam of 17°-34°-48°
- CRI>80 | 3 SDCM |as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 3000K-4000K color temperature
- upon request also available in 2700K-3500K-5000K and 6500K
- works with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

Beam Angle 17°

23574	15.0W	10 LEDS	220-240v	3000-4000 KELVIN	1200-1275 LUMEN	LENGTH=291mm	⬇ ⬆ ⚠
23575	22.5W	15 LEDS	220-240v	3000-4000 KELVIN	1800-1912 LUMEN	LENGTH=424mm	⬇ ⬆ ⚠
23576	30.0W	20 LEDS	220-240v	3000-4000 KELVIN	2400-2550 LUMEN	LENGTH=557mm	⬇ ⬆ ⚠
23577	45.0W	30 LEDS	220-240v	3000-4000 KELVIN	3600-3825 LUMEN	LENGTH=824mm	⬇ ⬆ ⚠
23578	60.0W	40 LEDS	220-240v	3000-4000 KELVIN	4800-5100 LUMEN	LENGTH=1089mm	⬇ ⬆ ⚠

Beam Angle 34°


23579	15.0W	10 LEDS	220-240v	3000-4000 KELVIN	1275-1350 LUMEN	LENGTH=291mm	⬇ ⬆ ⚠
23580	22.5W	15 LEDS	220-240v	3000-4000 KELVIN	1912-2025 LUMEN	LENGTH=424mm	⬇ ⬆ ⚠
23581	30.0W	20 LEDS	220-240v	3000-4000 KELVIN	2550-2700 LUMEN	LENGTH=557mm	⬇ ⬆ ⚠
23582	45.0W	30 LEDS	220-240v	3000-4000 KELVIN	3825-4050 LUMEN	LENGTH=824mm	⬇ ⬆ ⚠
23583	60.0W	40 LEDS	220-240v	3000-4000 KELVIN	5100-5400 LUMEN	LENGTH=1089mm	⬇ ⬆ ⚠

Beam Angle 48°

23584	15.0W	10 LEDS	220-240v	3000-4000 KELVIN	1350-1425 LUMEN	LENGTH=291mm	⬇ ⬆ ⚠
23585	22.5W	15 LEDS	220-240v	3000-4000 KELVIN	2025-2137 LUMEN	LENGTH=424mm	⬇ ⬆ ⚠
23586	30.0W	20 LEDS	220-240v	3000-4000 KELVIN	2700-2850 LUMEN	LENGTH=557mm	⬇ ⬆ ⚠
23587	45.0W	30 LEDS	220-240v	3000-4000 KELVIN	4050-4275 LUMEN	LENGTH=824mm	⬇ ⬆ ⚠
23588	60.0W	40 LEDS	220-240v	3000-4000 KELVIN	5400-5700 LUMEN	LENGTH=1089mm	⬇ ⬆ ⚠

GLASS (5mm)

CE IP65

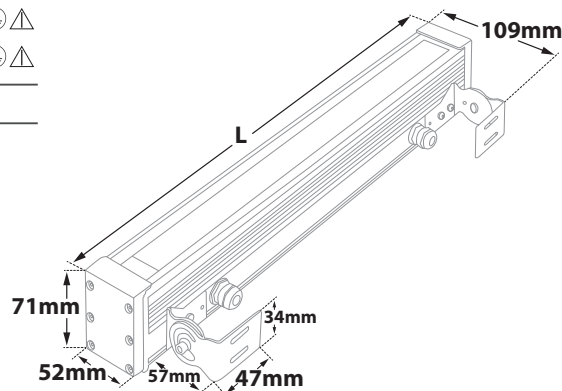

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection



Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin