

## Technoline 9 Slim High



- Linear waterproof led luminaire
- wall fixed mounted
- suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with protective front tempered glass transparent
- with incorporated High Power Led Smd technology
- adjusted inside a special black anti-glare optical screen
- with internal reflectors
- with symmetric angle beam of 17°-34°-48°
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 3000K-4000K color temperature
- upon request also available in 2700K-3500K-5000K and 6500K
- works with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

## CRI&gt;80 | Led source power &amp; Average Luminaire Flux

## Indicative Flux list | Final lumen output depends from the selection of the angle beam

## Beam Angle 17°

23544	15.0W   10 LEDS   220-240v   3000-4000 KELVIN   1200-1275 LUMEN	LENGTH=275mm	⚡ ⚡ ⚡
23545	22.5W   15 LEDS   220-240v   3000-4000 KELVIN   1800-1912 LUMEN	LENGTH=408mm	⚡ ⚡ ⚡
23546	30.0W   20 LEDS   220-240v   3000-4000 KELVIN   2400-2550 LUMEN	LENGTH=541mm	⚡ ⚡ ⚡
23547	45.0W   30 LEDS   220-240v   3000-4000 KELVIN   3600-3825 LUMEN	LENGTH=808mm	⚡ ⚡ ⚡
23548	60.0W   40 LEDS   220-240v   3000-4000 KELVIN   4800-5100 LUMEN	LENGTH=1073mm	⚡ ⚡ ⚡

## Beam Angle 34°


23549	15.0W   10 LEDS   220-240v   3000-4000 KELVIN   1275-1350 LUMEN	LENGTH=275mm	⚡ ⚡ ⚡
23550	22.5W   15 LEDS   220-240v   3000-4000 KELVIN   1912-2025 LUMEN	LENGTH=408mm	⚡ ⚡ ⚡
23551	30.0W   20 LEDS   220-240v   3000-4000 KELVIN   2550-2700 LUMEN	LENGTH=541mm	⚡ ⚡ ⚡
23552	45.0W   30 LEDS   220-240v   3000-4000 KELVIN   3825-4050 LUMEN	LENGTH=808mm	⚡ ⚡ ⚡
23553	60.0W   40 LEDS   220-240v   3000-4000 KELVIN   5100-5400 LUMEN	LENGTH=1073mm	⚡ ⚡ ⚡

## Beam Angle 48°

23554	15.0W   10 LEDS   220-240v   3000-4000 KELVIN   1350-1425 LUMEN	LENGTH=275mm	⚡ ⚡ ⚡
23555	22.5W   15 LEDS   220-240v   3000-4000 KELVIN   2025-2137 LUMEN	LENGTH=408mm	⚡ ⚡ ⚡
23556	30.0W   20 LEDS   220-240v   3000-4000 KELVIN   2700-2850 LUMEN	LENGTH=541mm	⚡ ⚡ ⚡
23557	45.0W   30 LEDS   220-240v   3000-4000 KELVIN   4050-4275 LUMEN	LENGTH=808mm	⚡ ⚡ ⚡
23558	60.0W   40 LEDS   220-240v   3000-4000 KELVIN   5400-5700 LUMEN	LENGTH=1073mm	⚡ ⚡ ⚡

GLASS (5mm)

CE IP65

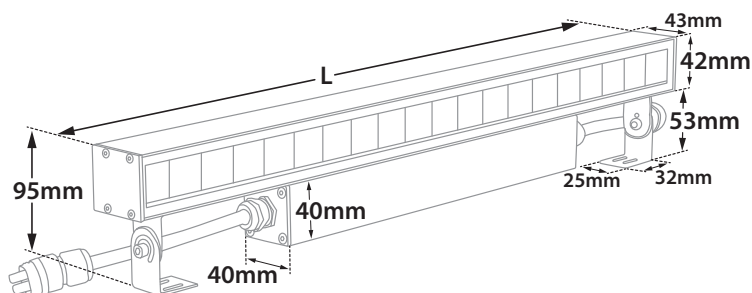

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin warm white 3000 Kelvin neutral white 4000 Kelvin