


Technoline 9 Slim Standard

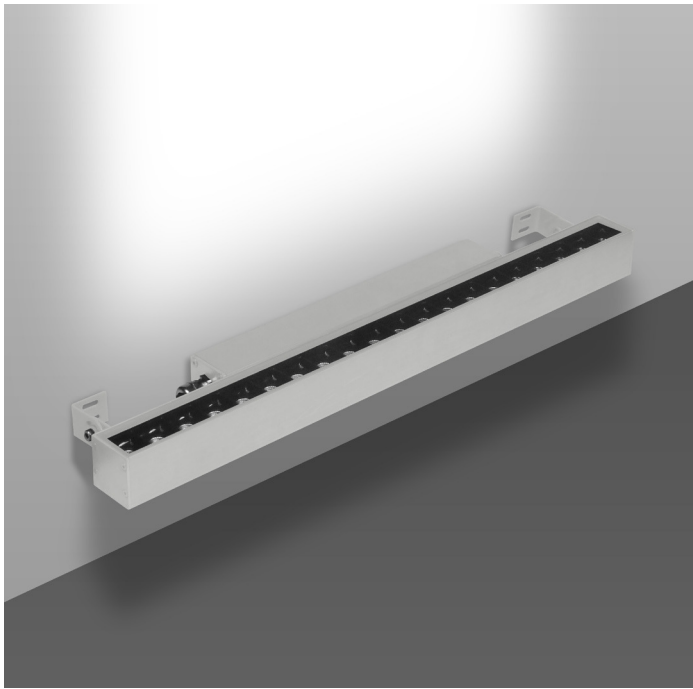

- Linear waterproof led luminaire
- wall fixed mounted
- suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with protective front tempered glass transparent
- with incorporated High Power Led Smd technology
- adjusted inside a special black anti-glare optical screen
- with internal reflectors
- with symmetric angle beam of 17°-34°-48°
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 3000K-4000K color temperature
- upon request also available in 2700K-3500K-5000K and 6500K
- works with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

Beam Angle 17°

23529	10.0W	10 LEDS	220-240v	3000-4000 KELVIN	800-850 LUMEN	LENGTH=275mm	⚡ ⚙ ⚠
23530	15.0W	15 LEDS	220-240v	3000-4000 KELVIN	1200-1275 LUMEN	LENGTH=408mm	⚡ ⚙ ⚠
23531	20.0W	20 LEDS	220-240v	3000-4000 KELVIN	1600-1700 LUMEN	LENGTH=541mm	⚡ ⚙ ⚠
23532	30.0W	30 LEDS	220-240v	3000-4000 KELVIN	2400-2550 LUMEN	LENGTH=808mm	⚡ ⚙ ⚠
23533	40.0W	40 LEDS	220-240v	3000-4000 KELVIN	3200-3400 LUMEN	LENGTH=1073mm	⚡ ⚙ ⚠

Beam Angle 34°


23534	10.0W	10 LEDS	220-240v	3000-4000 KELVIN	850-900 LUMEN	LENGTH=275mm	⚡ ⚙ ⚠
23535	15.0W	15 LEDS	220-240v	3000-4000 KELVIN	1275-1350 LUMEN	LENGTH=408mm	⚡ ⚙ ⚠
23536	20.0W	20 LEDS	220-240v	3000-4000 KELVIN	1700-1800 LUMEN	LENGTH=541mm	⚡ ⚙ ⚠
23537	30.0W	30 LEDS	220-240v	3000-4000 KELVIN	2550-2700 LUMEN	LENGTH=808mm	⚡ ⚙ ⚠
23538	40.0W	40 LEDS	220-240v	3000-4000 KELVIN	3400-3600 LUMEN	LENGTH=1073mm	⚡ ⚙ ⚠

Beam Angle 48°

23539	10.0W	10 LEDS	220-240v	3000-4000 KELVIN	900-950 LUMEN	LENGTH=275mm	⚡ ⚙ ⚠
23540	15.0W	15 LEDS	220-240v	3000-4000 KELVIN	1350-1425 LUMEN	LENGTH=408mm	⚡ ⚙ ⚠
23541	20.0W	20 LEDS	220-240v	3000-4000 KELVIN	1800-1900 LUMEN	LENGTH=541mm	⚡ ⚙ ⚠
23542	30.0W	30 LEDS	220-240v	3000-4000 KELVIN	2700-2850 LUMEN	LENGTH=808mm	⚡ ⚙ ⚠
23543	40.0W	40 LEDS	220-240v	3000-4000 KELVIN	3600-3800 LUMEN	LENGTH=1073mm	⚡ ⚙ ⚠

GLASS (5mm)

CE IP65

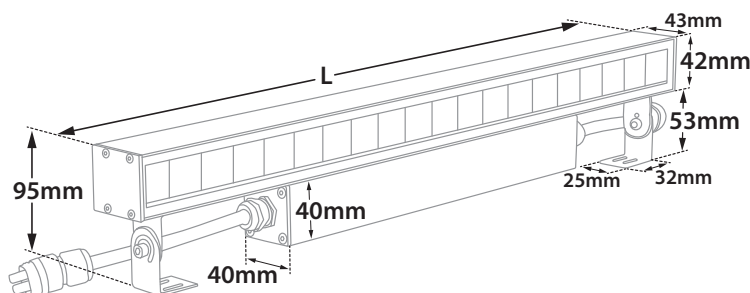

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin