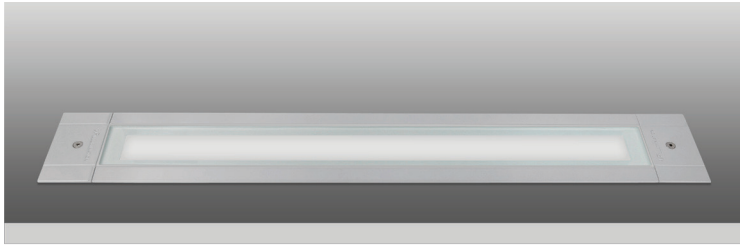


## Terra Line Led 8 LLE



- Linear inground recessed waterproof led luminaire
- suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 8mm thick mat
- with internal antiglare screen with grilles from aluminum
- with incorporated linear led smd modules
- adjusted on high performance linear heatsink
- for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- 110° beam angle
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 cable gland PG11 IP68 made from brass as standard
- or with 2 cable glands PG11 IP68 made from brass
- for input and output of power supply cables
- upon request is available with pre-connected cable

## CRI&gt;80 | Power &amp; Luminous Flux

30313	8.8W   220-240v   3000-4000 KELVIN   910-980 LUMEN   DIM (1)	⚡ ⚙ ⚙
30314	14W   220-240v   3000-4000 KELVIN   1120-1190 LUMEN   DIM (2)	⚡ ⚙ ⚙
30315	21W   220-240v   3000-4000 KELVIN   1680-1785 LUMEN   DIM (3)	⚡ ⚙ ⚙
30316	28W   220-240v   3000-4000 KELVIN   2240-2380 LUMEN   DIM (4)	⚡ ⚙ ⚙

Linear Led Engine/Module

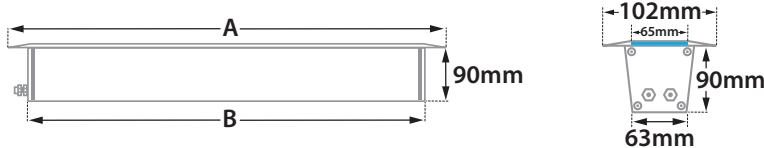


GLASS (8mm)



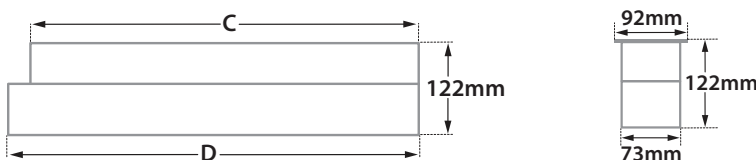


ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
[1]	30313	406mm	315mm	391mm	406mm	419mm	80mm	125mm
[2]	30314	702mm	611mm	687mm	702mm	715mm	80mm	125mm
[3]	30315	1002mm	911mm	987mm	1002mm	1015mm	80mm	125mm
[4]	30316	1302mm	1211mm	1287mm	1302mm	1315mm	80mm	125mm

## ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS



## ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

5339 IP68 RATED MULTI-WAY CONNECTOR BOX  
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

**ΠΡΟΣΟΧΗ:** Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

**WARNING:** In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

Standard color 18

Available colors upon request 01 02



\*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη, οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο. LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin