


- Linear inground recessed waterproof led luminaire suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with protective heavy duty inox (stainless steel) frame
- with ground base from aluminum
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of symmetrical beam angle 10°-15°-25°-35°-45°-60°\*
- or with lenses of elliptical beam angle 15°x35°, 20x60°\*
- or with lenses of asymmetrical beam angle\*\*
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection



## CRI&gt;80 | Power &amp; Luminous Flux

Final lumen output depends on the selection of the angle beam


8566		7.0W   7x1.0W	220-240v	3000-4000 KELVIN	560-595 LUMEN	DIM (1)	
8567		14.0W   14x1.0W	220-240v	3000-4000 KELVIN	1120-1190 LUMEN	DIM (2)	
8568		21.0W   21x1.0W	220-240v	3000-4000 KELVIN	1680-1785 LUMEN	DIM (3)	
8569		28.0W   28x1.0W	220-240v	3000-4000 KELVIN	2240-2380 LUMEN	DIM (4)	

GLASS (8mm)

CE IP67


**i** \*due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.

## \*\* Asymmetric Version

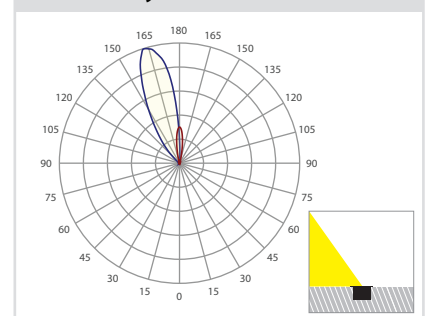


ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
[1]	8566	473mm	319mm	342mm	426mm	439mm	100mm	95mm
[2]	8567	713mm	615mm	648mm	732mm	745mm	100mm	95mm
[3]	8568	1113mm	915mm	978mm	1062mm	1075mm	100mm	95mm
[4]	8569	1313mm	1215mm	1278mm	1362mm	1375mm	100mm	95mm



## ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS

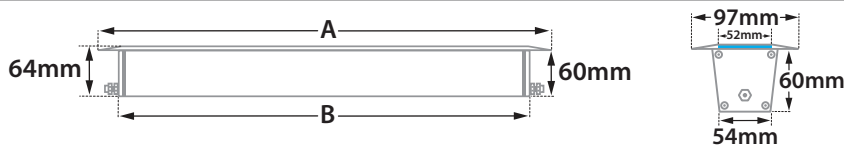

## ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

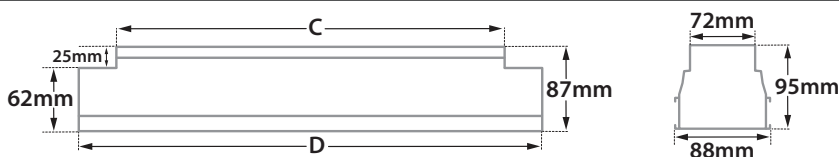5339 IP68 RATED MULTI-WAY CONNECTOR BOX  
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

With pre-connected IP68 male and female fis for fast connection



**ΠΡΟΣΟΧΗ:** Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέυσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλοι είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

**WARNING:** In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.