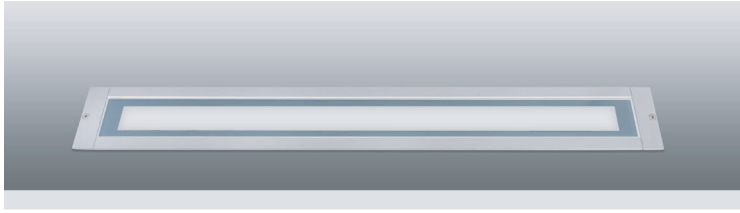


## Terra Line Led 5 LLE



- Linear inground recessed waterproof led luminaire
- suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 10mm thick mat
- with internal antiglare screen with grilles from aluminum
- with incorporated linear led smd modules
- adjusted on high performance linear heatsink
- for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- 110° beam angle
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with cable gland PG9 IP68 made from brass
- upon request is available with pre-connected cable
- with 1 cable gland PG9 IP68 made from brass as standard
- or with 2 cable glands PG9 IP68 made from brass
- for input and output of power supply cables
- upon request is available with pre-connected cable

## CRI 80 | Led source power &amp; Average Luminaire Flux

## Indicative Flux list | Final lumen output depends from the selection of the angle beam

30305 8.8W | 220-240v | 3000-4000 KELVIN | 910-980 LUMEN | DIM (1)



30306 14W | 220-240v | 3000-4000 KELVIN | 1120-1190 LUMEN | DIM (2)



30307 21W | 220-240v | 3000-4000 KELVIN | 1680-1785 LUMEN | DIM (3)



30308 28W | 220-240v | 3000-4000 KELVIN | 2240-2380 LUMEN | DIM (4)



Linear Led Engine/Module

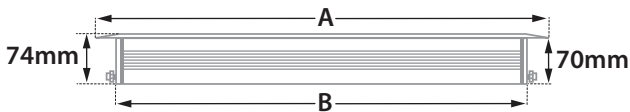


GLASS (10mm)






ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
1	30305	349mm	319mm	342mm	426mm	439mm	100mm	110mm
2	30306	645mm	615mm	648mm	732mm	745mm	100mm	110mm
3	30307	945mm	915mm	978mm	1062mm	1075mm	100mm	110mm
4	30308	1245mm	1215mm	1278mm	1362mm	1375mm	100mm	110mm

## ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS



## ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

5339 IP68 RATED MULTI-WAY CONNECTOR BOX  
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

**ΠΡΟΣΟΧΗ:** Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

**WARNING:** In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for some reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

Standard color 18

Available colors upon request 01 02



\*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin warm white 3000 Kelvin neutral white 4000 Kelvin