
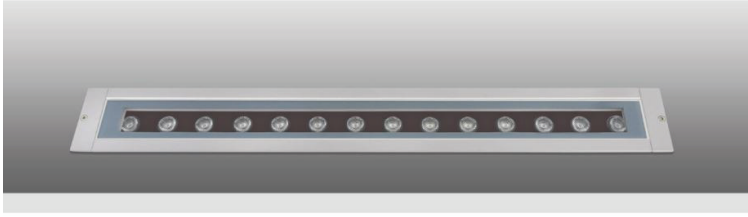


## Terra Line Led 6



- Linear in-ground recessed waterproof led luminaire suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- In 3000 - 4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of symmetrical beam angle 10°-15°-24°-28°-32°-41°-48°-63°
- or with lenses of elliptical beam angle 15°x35°, 22°x37°
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection

CRI&gt;80 | Power &amp; Luminous Flux at 28°

For information regarding other beam angles use the table factors for lumen output

30273	12.6W	7x1.80W	220-240V	3000-4000 KELVIN	1002-1070 LUMEN	DIM (1)	⏚ ⏚ ⏚
30274	25.2W	14x1.80W	220-240V	3000-4000 KELVIN	2003-2140 LUMEN	DIM (2)	⏚ ⏚ ⏚
30275	37.8W	21x1.80W	220-240V	3000-4000 KELVIN	3005-3210 LUMEN	DIM (3)	⏚ ⏚ ⏚
30276	50.4W	28x1.80W	220-240V	3000-4000 KELVIN	4007-4278 LUMEN	DIM (4)	⏚ ⏚ ⏚

GLASS (8mm)


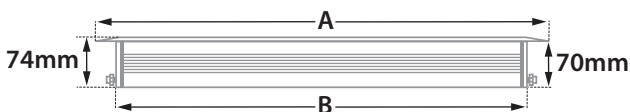
CE IP67

Beam angle	Factor
10°	0.86
15°	0.97
24°	0.96
28°	1.00
32°	0.86
41°	0.91
48°	0.89
63°	0.88
15°x35°	0.93
22°x37°	0.82



ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
[1]	30273	349mm	319mm	342mm	426mm	439mm	100mm	110mm
[2]	30274	645mm	615mm	648mm	732mm	745mm	100mm	110mm
[3]	30275	945mm	915mm	978mm	1062mm	1075mm	100mm	110mm
[4]	30276	1245mm	1215mm	1278mm	1362mm	1375mm	100mm	110mm

**i** \*upon request available at length 1545mm

## ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS

5339 IP68 RATED MULTI-WAY CONNECTOR BOX  
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

## ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

With pre-connected IP68  
male and female fis for fast connection

**ΠΡΟΣΟΧΗ:** Σε όλα τα φωτιστικά σώματα κωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

**WARNING:** In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

Standard color 18

Available colors upon request 01 02

**i** \*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin