



Terra Line Led 8

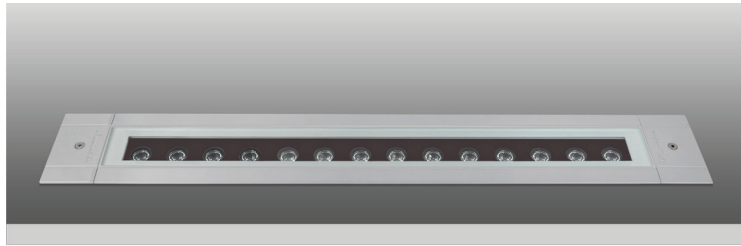

- Linear inground recessed waterproof led luminaire
- suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink
- for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- In 3000 - 4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of symmetrical beam angle 10°-15°-24°-28°-32°-41°-48°-63°
- or with lenses of elliptical beam angle 15°x35°, 22°x37°
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection

CRI>80 | Power & Luminous Flux at 28°

For information regarding other beam angles use the table factors for lumen output

30297	8.4W 7x1.20W	220-240V	3000-4000 KELVIN	734-777	LUMEN DIM (1)	⏏ ⏏ ⏏
30298	16.8W 14x1.20W	220-240V	3000-4000 KELVIN	1469-1553	LUMEN DIM (2)	⏏ ⏏ ⏏
30299	25.2W 21x1.20W	220-240V	3000-4000 KELVIN	2203-2330	LUMEN DIM (3)	⏏ ⏏ ⏏
30300	33.6W 28x1.20W	220-240V	3000-4000 KELVIN	2938-3107	LUMEN DIM (4)	⏏ ⏏ ⏏

GLASS (8mm)


CE IP67

ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
1	30297	406mm	315mm	391mm	406mm	419mm	80mm	125mm
2	30298	702mm	611mm	687mm	702mm	715mm	80mm	125mm
3	30299	1002mm	911mm	987mm	1002mm	1015mm	80mm	125mm
4	30300	1302mm	1211mm	1287mm	1302mm	1315mm	80mm	125mm


Beam angle	Factor
10°	0.86
15°	0.97
24°	0.96
28°	1.00
32°	0.86
41°	0.91
48°	0.89
63°	0.88
15°x35°	0.93
22°x37°	0.82

i *upon request available at length 1545mm



ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS

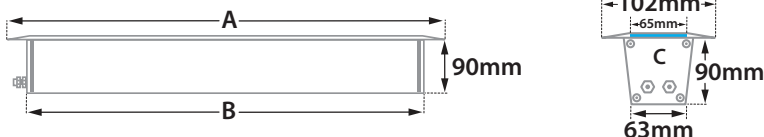

ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

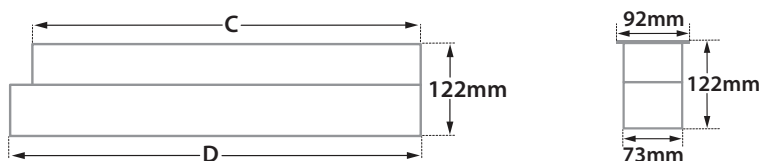

With pre-connected IP68
male and female fis for fast connection



5339 IP68 RATED MULTI-WAY CONNECTOR BOX
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ



ΠΡΟΣΟΧΗ: Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.