



Terra Line Led 9

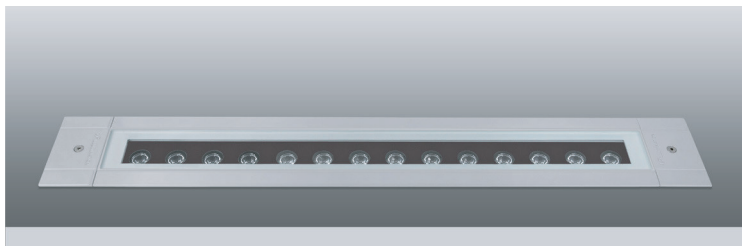

- Linear inground recessed waterproof led luminaire
- suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink
- for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of symmetrical beam angle 10°-15°-25°-35°-45°-60°*
- or with lenses of elliptical beam angle 15°x35°, 20x60°*
- or with lenses of asymmetrical beam angle**
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fast connection with IP68 protection

CRI>80 | Power & Luminous Flux

Final lumen output depends on the selection of the angle beam


30301		10.5W 7x1.5W 220-240v 3000-4000 KELVIN 840-875 LUMEN DIM (1)	
30302		21.0W 14x1.5W 220-240v 3000-4000 KELVIN 1680-1750 LUMEN DIM (2)	
30303		31.5W 21x1.5W 220-240v 3000-4000 KELVIN 2520-2625 LUMEN DIM (3)	
30304		42.0W 28x1.5W 220-240v 3000-4000 KELVIN 3360-3500 LUMEN DIM (4)	

GLASS (8mm)




ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
[1]	30301	406mm	315mm	391mm	406mm	419mm	80mm	125mm
[2]	30302	702mm	611mm	687mm	702mm	715mm	80mm	125mm
[3]	30303	1002mm	911mm	987mm	1002mm	1015mm	80mm	125mm
[4]	30304	1302mm	1211mm	1287mm	1302mm	1315mm	80mm	125mm



ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS

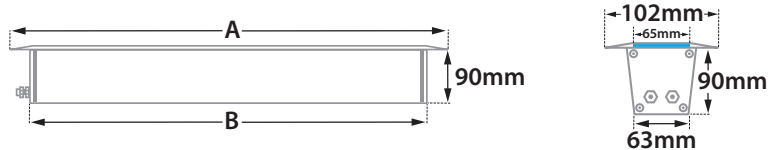

ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

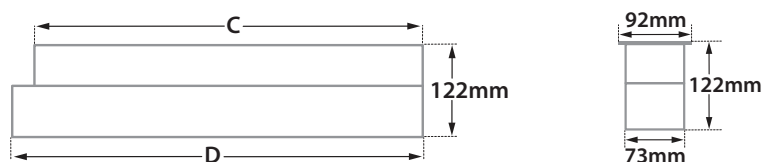

With pre-connected IP68 male and female fis for fast connection




ΠΡΟΣΟΧΗ: Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP68 rating.

i *due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.

** Asymmetric Version

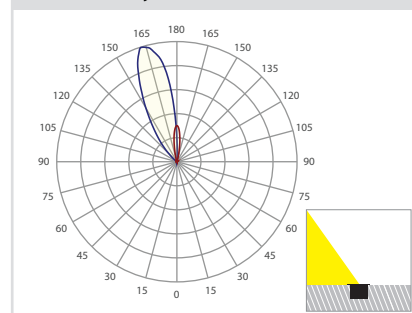

5339 IP68 RATED MULTI-WAY CONNECTOR BOX
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ



Standard color 18

Available colors upon request 01 02

i *Η τεχνολογία των LED είναι σε διαρκή εξέλιξη, οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο. LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin