

## Line 10 Dark CL



- Φωτιστικό led εσωτερικού χώρου
  - κατάλληλο για τοποθέτηση σε οροφή
  - από χυτό προφίλ αλουμινίου
  - ηλεκτροστατικά βαμμένο
  - με ενσωματωμένα High Power Led τεχνολογίας Smd
  - τοποθετημένα σε ειδικό οπτικό, βαμμένο σε μαύρο χρώμα
  - για μείωση της θάμβωσης
  - με εσωτερικούς ανακλαστήρες με δέσμη 18°-38°-48°
  - τοποθετημένο σε ψήκτρα υψηλής απόδοσης
  - για την καλύτερη διαχείριση θερμότητας του led
  - CRI>90 | 3 SDCM
  - κατόπιν παραγγελίας με CRI 95+
  - σε θερμοκρασία χρώματος 3000-4000 Kelvin
  - κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
  - λειτουργεί με ενσωματωμένο led driver on/off
  - κατόπιν παραγγελίας dimmable phase cut/1-10v/Dali
- Ceiling mounted led luminaire
  - for indoors use
  - from extruded aluminum powder coated
  - with incorporated High Power Led Smd technology
  - adjusted inside a special black anti-glare optical screen
  - suitable for darklight effect
  - with internal reflectors
  - with symmetric angle beam of 18°-38°-48°
  - positioned on a high performance heatsink
  - for best thermal management of led source
  - CRI>90 | 3 SDCM as standard
  - upon request available with CRI 95+
  - in 3000-4000 Kelvin
  - upon request in 2700-3500-5000-6500 Kelvin
  - with built in led driver on/of as standard
  - upon request dimmable phase cut/1-10v/Dali

## CRI&gt;90 | System power &amp; Luminous flux


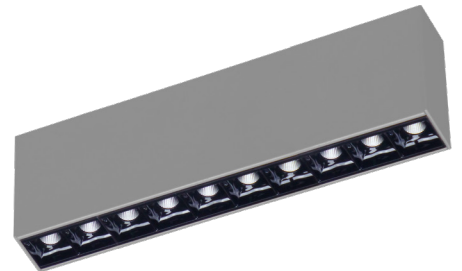
## Beam Angle 18°

25664  12.0W | 220-240V | 3000-4000 KELVIN | 1106-1222 LUMEN:   25665  18.0W | 220-240V | 3000-4000 KELVIN | 1532-1694 LUMEN:   25666  24.0W | 220-240V | 3000-4000 KELVIN | 2052-2264 LUMEN:   

## Beam Angle 38°

25667  12.0W | 220-240V | 3000-4000 KELVIN | 1160-1270 LUMEN:   25668  18.0W | 220-240V | 3000-4000 KELVIN | 1614-1780 LUMEN:   25669  24.0W | 220-240V | 3000-4000 KELVIN | 2146-2382 LUMEN:   

## Beam Angle 48°

25670  12.0W | 220-240V | 3000-4000 KELVIN | 1140-1264 LUMEN:   25671  18.0W | 220-240V | 3000-4000 KELVIN | 1600-1750 LUMEN:   25672  24.0W | 220-240V | 3000-4000 KELVIN | 2102-2344 LUMEN:    271mmx36.5mm 86mmCE 

Fixed

