

Technoline 2 Led



- Linear led lighting fitting
- wall fixed mounted
- waterproof suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with symmetric lenses 10°-15°-25°-35°-45°-60°*
- or elliptical beam lenses 15°x35° , 20x60°*
- or wall washing lenses
- works with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

i *due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.


CRI 80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

9761		5.0W	5x1.0W	220-240v	2700-3000-4000 KELVIN	400-425-450 LUMEN	LENGTH=230mm	
9762		7.0W	7x1.0W	220-240v	2700-3000-4000 KELVIN	560-595-630 LUMEN	LENGTH=320mm	
9763		14.0W	14x1.0W	220-240v	2700-3000-4000 KELVIN	1120-1190-1260 LUMEN	LENGTH=620mm	
9764		21.0W	21x1.0W	220-240v	2700-3000-4000 KELVIN	1680-1785-1890 LUMEN	LENGTH=920mm	
9765		28.0W	28x1.0W	220-240v	2700-3000-4000 KELVIN	2240-2380-2520 LUMEN	LENGTH=1220mm	
23650		35.0W	35x1.0W	220-240v	2700-3000-4000 KELVIN	2800-2975-3150 LUMEN	LENGTH=1520mm	

GLASS (5mm)

CE

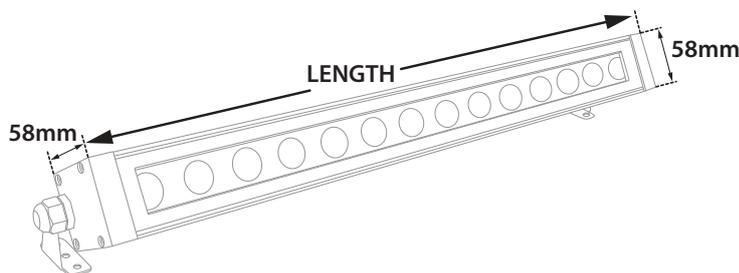

Standard color 18

Available colors upon request 01 02

i *Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin