

## Lip 120 Ceiling Move 1




- Προβολέας led εσωτερικού χώρου
  - κατάλληλος για τοποθέτηση σε οροφή
  - χυτός αλουμινίου
  - κινητό οριζοντίως  $\pm 350^\circ$  και καθέτως  $\pm 20^\circ$
  - με ενσωματωμένο 1 COB LED ισχύος
  - ενσωματωμένο σε ψήκτρα υψηλής απόδοσης
  - για την καλύτερη διαχείριση θερμότητας του led
  - τοποθετημένο βαθιά στο φωτιστικό
  - για μείωση της θάμβωση
  - κατάλληλος για darklight φωτισμό
  - CRI>80 | 3 SDCM
  - κατόπιν παραγγελίας με CRI>90 & CRI 98+
  - σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
  - κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
  - με ανακλαστήρα ή φακό υψηλής απόδοσης
  - με δέσμη  $15^\circ-25^\circ-40^\circ-60^\circ$  μοιρών
  - λειτουργεί με ενσωματωμένο led driver on/off
  - κατόπιν παραγγελίας dimmable phase cut/1-10v/Dali
- Ceiling mounted led luminaire
  - for indoors use
  - tiltable
  - movable horizontally  $\pm 350^\circ$
  - and vertically  $\pm 20^\circ$
  - from die cast aluminum
  - with incorporated 1 cob led source
  - adjusted on a high performance heatsink
  - for best thermal management of led source
  - suitable for darklight effect
  - with led source positioned deep inside the luminaire
  - for reduce of glare
  - CRI>80 | 3 SDCM as standard
  - upon request available with CRI>90 & CRI 98+
  - upon request available with 2 SDCM
  - in 2700-3000-4000 Kelvin
  - upon request in 3500-5000-6500 Kelvin
  - with high performance reflector or lens
  - available with  $15^\circ-25^\circ-40^\circ-60^\circ$  beam angle
  - with built in led driver on/off as standard
  - upon request dimmable phase cut/1-10v/Dali

## CRI 80 | Luminaire Flux | Standard Lumen Performance

|       |       |          |                       |                    |       |
|-------|-------|----------|-----------------------|--------------------|-------|
| 25683 | 6.7W  | 220-240v | 2700-3000-4000 KELVIN | 585-615-640 LUMEN  | ⚡ ⚡ ⚡ |
| 25684 | 7.5W  | 220-240v | 2700-3000-4000 KELVIN | 645-675-705 LUMEN  | ⚡ ⚡ ⚡ |
| 25685 | 9.0W  | 220-240v | 2700-3000-4000 KELVIN | 780-820-860 LUMEN  | ⚡ ⚡ ⚡ |
| 25686 | 11.0W | 220-240v | 2700-3000-4000 KELVIN | 925-965-1000 LUMEN | ⚡ ⚡ ⚡ |

## CRI 80 | Luminaire Flux | High Lumen Performance

|       |       |          |                       |                      |       |
|-------|-------|----------|-----------------------|----------------------|-------|
| 25687 | 8.5W  | 220-240v | 2700-3000-4000 KELVIN | 885-910-950 LUMEN    | ⚡ ⚡ ⚡ |
| 25688 | 10.5W | 220-240v | 2700-3000-4000 KELVIN | 1050-1080-1125 LUMEN | ⚡ ⚡ ⚡ |

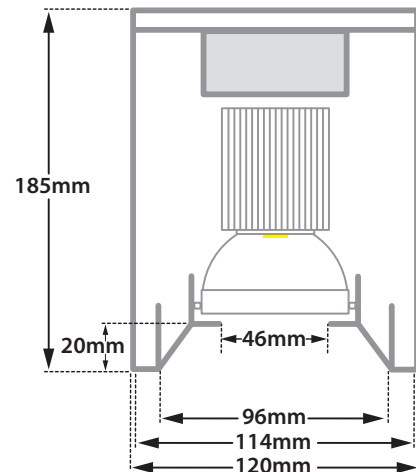

## Accessories upon request




Honey comb louver




Smooth Filter



Elliptical Filter



Anti-dazzle Angle



Περιστρεφόμενο  $350^\circ$  οριζοντίως και  $\pm 20^\circ$  καθέτως  
Adjustable  $350^\circ$  horizontally and  $\pm 20^\circ$  vertically