


## Technoline 7 High

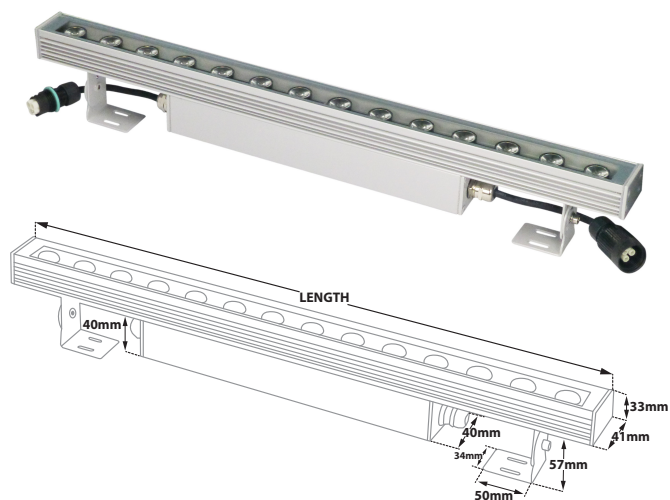

- Linear led lighting fitting
- wall fixed mounted
- waterproof suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with symmetric lenses 11°-15°-24°-28°-32°-41°-48°-63°
- or elliptical beam lenses 15°x35°, 22x37°
- work with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

CRI&gt;80 | System power &amp; Luminaire Flux at 28°

For information regarding other beam angles use the table factors for lumen output

|       |                 |          |                       |                      |               |       |
|-------|-----------------|----------|-----------------------|----------------------|---------------|-------|
| 23656 | 28.0W   14x2.0W | 220-240V | 2700-3000-4000 KELVIN | 2440-2568-2766 LUMEN | LENGTH=585mm  | ⚠ ⚡ ⚠ |
| 23657 | 42.0W   21x2.0W | 220-240V | 2700-3000-4000 KELVIN | 3660-3852-4149 LUMEN | LENGTH=885mm  | ⚠ ⚡ ⚠ |
| 23658 | 56.0W   28x2.0W | 220-240V | 2700-3000-4000 KELVIN | 4880-5136-5532 LUMEN | LENGTH=1185mm | ⚠ ⚡ ⚠ |
| 23659 | 70.0W   35x2.0W | 220-240V | 2700-3000-4000 KELVIN | 6100-6420-6915 LUMEN | LENGTH=1425mm | ⚠ ⚡ ⚠ |

GLASS (5mm)

CE IP65

| Beam angle | Factor |
|------------|--------|
| 11°        | 0.86   |
| 15°        | 0.97   |
| 24°        | 0.96   |
| 28°        | 1.00   |
| 32°        | 0.86   |
| 41°        | 0.91   |
| 48°        | 0.89   |
| 63°        | 0.88   |
| 15°x35°    | 0.93   |
| 22°x37°    | 0.82   |

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

