



Line 46 Frameless

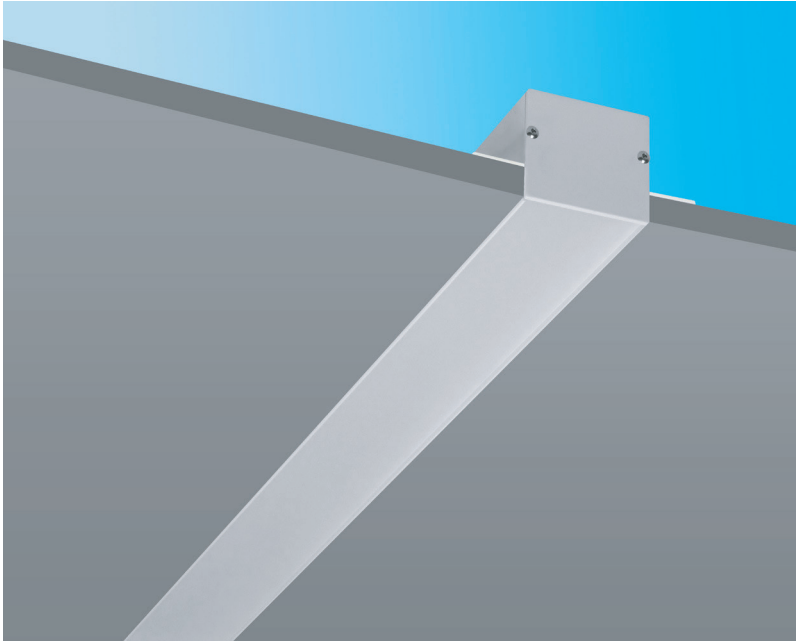

- Γραμμικό φωτιστικό χωνευτό οροφής
 - εσωτερικού χώρου
 - χωρίς εξωτερικό πλαίσιο
 - frameless/trimless
 - από προφίλ αλουμινίου
 - με πολυκαρμπονικό κάλυμμα σατινέ/οπάλ
 - με ενσωματωμένο Linear Led Modules
 - τοποθετημένα σε γραμμική ψήκτρα
 - για την καλύτερη διαχείριση της θερμότητας των led
 - CRI80 | 3 SDCM
 - σε θερμοκρασίας χρώματος 3000-4000 Kelvin
 - κατόπιν παραγγελίας και σε 2700-5000-6500 Kelvin
 - κατόπιν παραγγελίας και με CRI>90
 - λειτουργεί με ενσωματωμένο LED driver on/off
 - διαθέσιμο και με dimmable phase cut/Dali/1-10v
 - κατάλληλο για ομοιογενή φωτισμό χωρίς κενά
- Linear led recessed ceiling luminaire
 - for indoors use
 - frameless/trimless
 - from extruded aluminum powder coated
 - with polycarbonate satin opal cover
 - with incorporated 1 line of Linear Led Modules
 - adjusted on a linear cooling system
 - for best thermal management
 - CRI>80 | 3 SDCM
 - upon request available with CRI>90
 - CCT 3000-4000 Kelvin
 - upon request also available in 2700-5000-6500 Kelvin
 - works with built in led driver, on/off as standard
 - upon request dimmable phase cut/Dali/1-10v
 - seamless effect without shadows between modules

CRI>80 | Power and luminous flux

CODE	EXTERNAL DIMENSIONS		CUTTING DIMENSIONS		HEIGHT mm	VERSION 1 LM/W 85		VERSION 2 LM/W 100		VERSION 3 LM/W 85		VERSION 4 LM/W 100	
	LENGTH mm	WIDTH mm	LENGTH mm	WIDTH mm		POWER WATT	FINAL LUMEN OUTPUT	POWER WATT	FINAL LUMEN OUTPUT	POWER WATT	FINAL LUMEN OUTPUT	POWER WATT	FINAL LUMEN OUTPUT
39845	165	46	167	48	60	3	255	3.1	310	4	340	4.3	430
39846	305	46	307	48	60	6	510	6.2	620	8	680	8.6	860
39847	445	46	447	48	60	9	765	9.3	930	12	1020	12.9	1290
39848	585	46	587	48	60	12	1020	12.4	1240	16	1360	17.2	1720
39849	725	46	727	48	60	15	1275	15.5	1550	20	1700	21.5	2150
39850	865	46	867	48	60	18	1530	18.6	1860	24	2040	25.8	2580
39851	1005	46	1007	48	60	21	1785	21.7	2170	28	2380	30.1	3010
39852	1145	46	1147	48	60	24	2040	24.8	2480	32	2720	34.4	3440
39853	1285	46	1287	48	60	27	2295	27.9	2790	36	3060	38.7	3870
39854	1425	46	1427	48	60	30	2550	31	3100	40	3400	43	4300
39855	1565	46	1567	48	60	33	2805	34.1	3410	44	3740	47.3	4730
34867	1715	46	1717	48	60	36	3060	37.2	3720	48	4080	51.6	5160
34868	1855	46	1857	48	60	39	3315	40.3	4030	52	4420	55.9	5590
34869	1995	46	1997	48	60	42	3570	43.4	4340	56	4760	60.2	6020
34870	2135	46	2137	48	60	45	3825	46.5	4650	60	5100	64.5	6450
34871	2275	46	2277	48	60	48	4080	49.6	4960	64	5440	68.8	6880
34872	2415	46	2417	48	60	51	4335	52.7	5270	68	5780	73.1	7310
34873	2555	46	2557	48	60	54	4590	55.8	5580	72	6120	77.4	7740
34874	2695	46	2697	48	60	57	4845	58.9	5890	76	6460	81.7	8170
34875	2835	46	2837	48	60	60	5100	62	6200	80	6800	86	8600
34876	2975	46	2977	48	60	63	5355	65.1	6510	84	7140	90.3	9030
34877	3125	46	3127	48	60	66	5610	68.2	6820	88	7480	94.6	9460
34878	3265	46	3267	48	60	69	5865	71.3	7130	92	7820	98.9	9890
34879	3405	46	3407	48	60	72	6120	74.4	7440	96	8160	103.2	10320
34880	3545	46	3547	48	60	75	6375	77.5	7750	100	8500	107.5	10750
34881	3685	46	3687	48	60	78	6630	80.6	8060	104	8840	111.8	11180
34882	3825	46	3827	48	60	81	6885	83.7	8370	108	9180	116.1	11610
34883	3965	46	3967	48	60	84	7140	86.8	8680	112	9520	120.4	12040

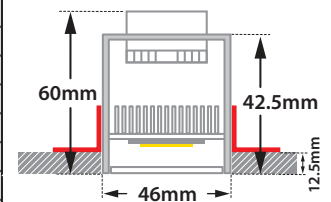

Κατόπιν παραγγελίας το φωτιστικό προσφέρεται 4,50m σε ενιαίο σώμα
 Upon request luminaire is offered 4.50m long in one single piece

Linear Led Module

