
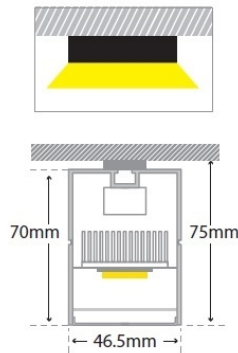


## LINE 46 DARK COMB 1



- ▶ Γραμμικό LED φωτιστικό εξωτερικό
- ▶ εσωτερικού χώρου
- ▶ κατάλληλο για τοποθέτηση σε οροφή
- ▶ ή κρεμαστό με kit ανάρτησης\*
- ▶ από προφίλ αλουμινίου
- ▶ με πολυκαρμπονικό κάλυμμα οπάλ/σατινέ
- ▶ με ενσωματωμένο Linear Led Modules
- ▶ κατάλληλο για διάχυτο φωτισμό
- ▶ και ενσωματωμένα High Power Led τεχνολογίας Smd
- ▶ τοποθετημένα σε ειδικό οπτικό, βαμμένο σε μαύρο χρώμα
- ▶ για μείωση της θάμβωσης
- ▶ με εσωτερικούς ανακλαστήρες 12°-34°-48°
- ▶ τοποθετημένα σε γραμμική ψήκτρα
- ▶ για καλύτερη διαχείριση της θερμοκρασίας
- ▶ σε θερμοκρασία χρώματος 3000K - 4000K
- ▶ CRI>80 | 3SDCM
- ▶ λειτουργεί με ενσωματωμένο LED driver on/off
- ▶ κατόπιν παραγγελίας dimmable phase cut/Dali/1-10v


- ▶ Linear led luminaire
- ▶ surface mounted or suspended with suspension kit\*
- ▶ for indoors use
- ▶ from extruded aluminum powder coated
- ▶ with polycarbonate satin/opal cover
- ▶ with incorporated Linear Led Modules
- ▶ CRI>80 | 3SDCM as standard
- ▶ with incorporated High Power Led Smd technology
- ▶ adjusted inside a special black anti-glare optical screen
- ▶ suitable for darklight effect
- ▶ with internal reflectors
- ▶ with symmetric angle beam of 12°-34°-48°
- ▶ adjusted on a linear cooling system
- ▶ for best heat management
- ▶ in 3000K or 4000K color temperature
- ▶ works with built in led driver on/off as standard
- ▶ upon request dimmable phase cut/Dali/1-10v

## L1 EXTERNAL DIMENSIONS

CODE	LENGTH	LUMEN VERSION 1		LUMEN VERSION 2	
	mm	POWER WATT	FINAL LUMEN OUTPUT	POWER WATT	FINAL LUMEN OUTPUT
39048	315	6.2	620	8.6	860
39049	455	9.3	930	12.9	1290
39050	595	12.4	1240	17.2	1720
39051	735	15.5	1550	21.5	2150
39052	875	18.6	1860	25.8	2580
39053	1015	21.7	2170	30.1	3010
39054	1155	24.8	2480	34.4	3440
39055	1295	27.9	2790	38.7	3870
39056	1435	31	3100	43	4300
39057	1575	34.1	3410	47.3	4730
39058	1725	37.2	3720	51.6	5160
39059	1865	40.3	4030	55.9	5590
39060	2005	43.4	4340	60.2	6020
39061	2145	46.5	4650	64.5	6450
39062	2285	49.6	4960	68.8	6880
39063	2425	52.7	5270	73.1	7310
39064	2565	55.8	5580	77.4	7740
39065	2705	58.9	5890	81.7	8170
39066	2845	62	6200	86	8600
39067	2985	65.1	6510	90.3	9030
39068	3135	68.2	6820	94.6	9460
39069	3275	71.3	7130	98.9	9890
39070	3415	74.4	7440	103.2	10320
39071	3555	77.5	7750	107.5	10750

## L2 EXTERNAL DIMENSIONS

CODE	LENGTH mm	NUMBER OF LED SOURCES	POWER WATT	3000K beam angle 12°	4000K beam angle 12°	3000K beam angle 34°	4000K beam angle 34°	3000K beam angle 48°	4000K beam angle 48°
				L2-132-5	132	5	5	410	435
L2-132-7.5	132	5	7.5	595	625	625	655	655	690
L2-132-10	132	5	10	725	770	760	810	800	850
L2-234-10	234	10	10	820	870	860	910	900	950
L2-234-15	234	10	15	1190	1250	1250	1310	1310	1380
L2-234-20	234	10	20	1450	1540	1520	1620	1600	1700
L2-396-15	396	15	15	1230	1305	1290	1365	1350	1425
L2-396-22.5	396	15	22.5	1230	1305	1290	1365	1350	1425
L2-396-30	396	15	30	2175	2310	2280	2430	2400	2550
L2-528-20	528	20	20	2460	2610	2580	2730	2700	2850
L2-528-30	528	20	30	2460	2610	2580	2730	2700	2850
L2-528-40	528	20	40	4350	4620	4560	4860	4800	5100



## SUSPENSION KIT

Composed by 2-5 pcs (depending from the length of luminaire) of steel wire with length 1.20m standard length (upon request available in longer lengths) assembled to fitting with all necessary components for ceiling installation, with 1.50m long power supply cable 3x0.75mm transparent-white-black-grey (upon request available in longer lengths), connected to fitting, and 1 pcs of round die cast aluminum ceiling base, painted in same color with luminaire, with external diameter d=60mm and height=15mm.



01 02 18

Βαμμένα με Ηλεκτροστατική Βαφή  
Painted with Electrostatic Powder



\*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε πιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin