


## LINE COVE 1 CV



- Linear led luminaire
- for indoors use
- suitable for cove lighting
- from extruded aluminum power coated
- with incorporated high power led smd
- adjusted on a linear cooling system
- for thermal management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90 & CRI 98+
- in 2700-3000-4000 Kelvin
- upon request also available in 3500-5000-6500 Kelvin
- with symmetric lenses
- of 8°-10°-15°-25°-35°-45°-60° beam angle\*
- or with elliptical beam lenses
- of 10°x60°-20°x60°-15°x32° beam angle\*
- input voltage 24v DC
- works with remote led driver
- on/off or dimmable Dali/1-10v
- with male and female fis for fast connection
- no gap between connections



\*due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.

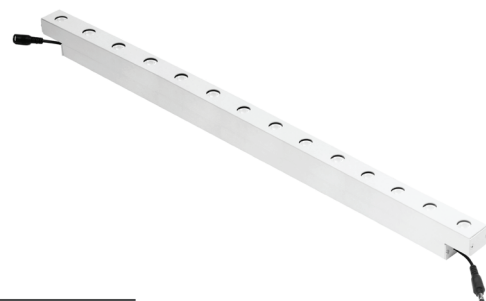


## CRI&gt;80 | Led source power &amp; Average Luminaire Flux

## Indicative Flux list | Final lumen output depends from the selection of the angle beam

39720		7.0W	7x1.0W	24V DC	2700-3000-4000 KELVIN	560-595-630 LUMEN	LENGTH=312mm	
39721		14.0W	14x1.0W	24V DC	2700-3000-4000 KELVIN	1120-1190-1260 LUMEN	LENGTH=592mm	
39722		21.0W	21x1.0W	24V DC	2700-3000-4000 KELVIN	1680-1785-1890 LUMEN	LENGTH=872mm	
39723		28.0W	28x1.0W	24V DC	2700-3000-4000 KELVIN	2240-2380-2520 LUMEN	LENGTH=1152mm	
39724		35.0W	35x1.0W	24V DC	2700-3000-4000 KELVIN	2800-2975-3150 LUMEN	LENGTH=1432mm	




IP20 | IP40 Upon request

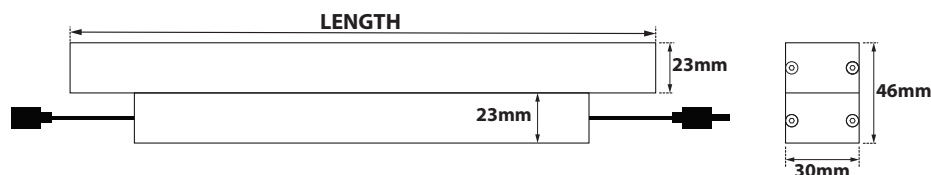MALE AND FEMALE FIS  
FOR FAST CONNECTION

LED SPACING

40mm



Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin warm white 3000 Kelvin neutral white 4000 Kelvin