

LINE COVE 2 CV



- > Linear led luminaire
- > for indoors use
- > suitable for cove lighting
- > from extruded aluminum power coated
- > with incorporated high power led smd
- > adjusted on a linear cooling system
- > for thermal management
- > CRI>80 | 3 SDCM as standard
- > upon request available with CRI>90 & CRI 98+
- > in 2700-3000-4000 Kelvin
- > upon request also available in 3500-5000-6500 Kelvin
- > with symmetric lenses
- > of 8°-10°-15°-25°-35°-45°-60° beam angle*
- > or with elliptical beam lenses
- > of 10°x60°-20°x60°-15°x32° beam angle*
- > input voltage 24v DC
- > works with remote led driver
- > on/off or dimmable Dali/1-10v
- > with male and female fis for fast connection
- > no gap between connections



i *due to wide variety of available and suitable lenses for above luminaire, the included angle beams are indicative and can be considered as the most used. Upon request the beam angle of the lenses can be adjusted accordingly to your needs.

CRI>80 | Led source power & Average Luminaire Flux


Indicative Flux list | Final lumen output depends from the selection of the angle beam

39725	7.0W 7x1.0W 24V DC	2700-3000-4000 KELVIN	560-595-630 LUMEN	LENGTH=312mm	⊕ ⊖
39726	14.0W 14x1.0W 24V DC	2700-3000-4000 KELVIN	1120-1190-1260 LUMEN	LENGTH=592mm	⊕ ⊖
39727	21.0W 21x1.0W 24V DC	2700-3000-4000 KELVIN	1680-1785-1890 LUMEN	LENGTH=872mm	⊕ ⊖
39728	28.0W 28x1.0W 24V DC	2700-3000-4000 KELVIN	2240-2380-2520 LUMEN	LENGTH=1152mm	⊕ ⊖
39729	35.0W 35x1.0W 24V DC	2700-3000-4000 KELVIN	2800-2975-3150 LUMEN	LENGTH=1432mm	⊕ ⊖

CE IP20 | IP40 Upon request

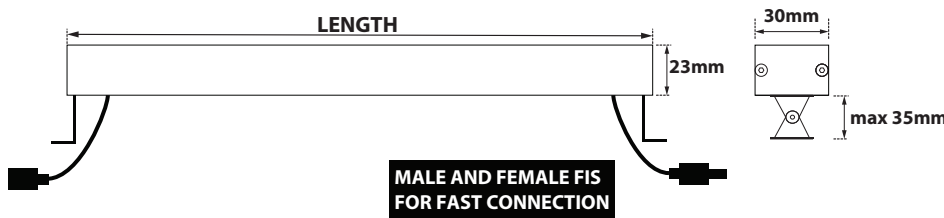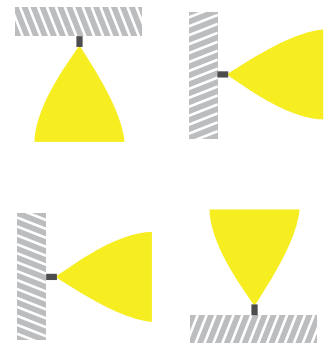

Bracket can be customized in different dimensions

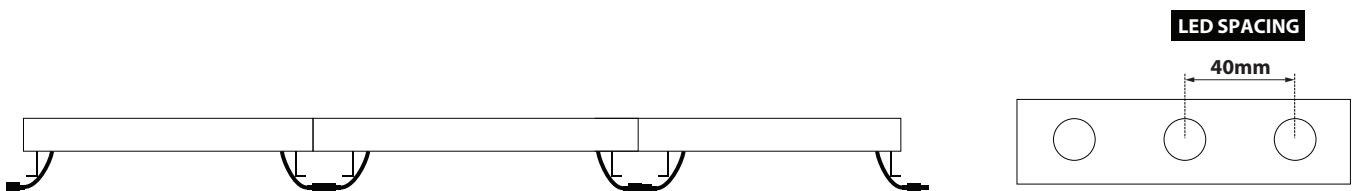

Standard color 18

Available colors upon request 01 02

i LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin