



## Frame Ground Led 2 NV

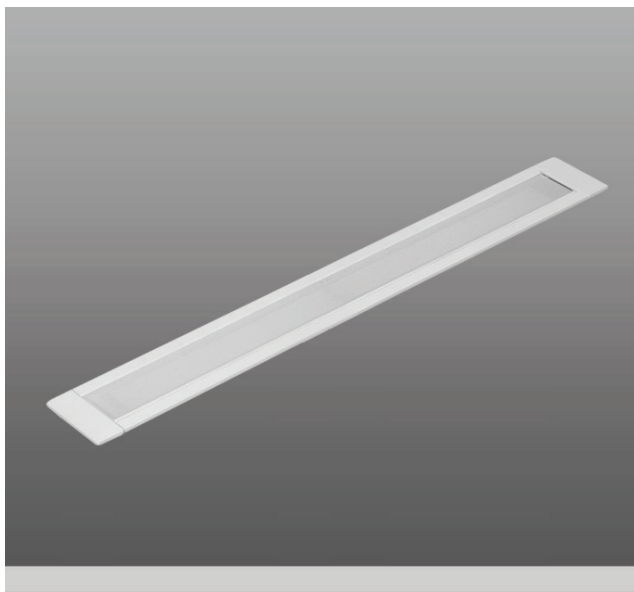




- sLinear inground recessed waterproof led luminaire
- with frame
- suitable for outdoors use
- body made from extruded aluminum polyester powder coated
- ground base made from extruded aluminum polyester powder coated
- with die cast aluminum end caps polyester powder coated
- with tempered opal/mat glass 6mm thick
- with rubber gaskets and stainless-steel screws
- with one or two cable glands IP68
- with pre-connected male and female IP68 fis fast connection
- with incorporated power led smd
- adjusted on a high performance linear heatsink
- for best thermal management of led source
- CRI>80 | available in 2700-3000-4000 Kelvin
- upon request available in 6500 Kelvin
- input voltage 24volt DC as standard
- works with external/remote constant voltage led driver
- upon request available in different lengths

### CRI>80 | Power & Luminous flux


<b>30550</b>		<b>5.5W</b>   24V DC   2700 - 3000 - 4000 KELVIN   214 - 228 - 235 LUMEN   DIM 1   <b>L:327mm</b>		
<b>30551</b>		<b>11.0W</b>   24V DC   2700 - 3000 - 4000 KELVIN   428 - 456 - 470 LUMEN   DIM 2   <b>L:607mm</b>		
<b>30552</b>		<b>16.5W</b>   24V DC   2700 - 3000 - 4000 KELVIN   642 - 684 - 705 LUMEN   DIM 3   <b>L:887mm</b>		
<b>30553</b>		<b>22.0W</b>   24V DC   2700 - 3000 - 4000 KELVIN   857 - 912 - 940 LUMEN   DIM 4   <b>L:1167mm</b>		

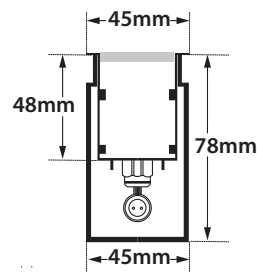



ΔΙΑΣΤΑΣΕΙΣ DIMENSIONS			ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	A	B	LENGTH	WIDTH	DEPTH
1	327	309	319	45	85
2	607	589	599	45	85
3	887	869	879	45	85
4	1167	1149	1159	45	85

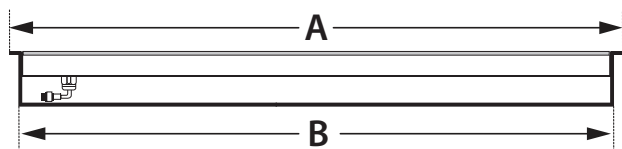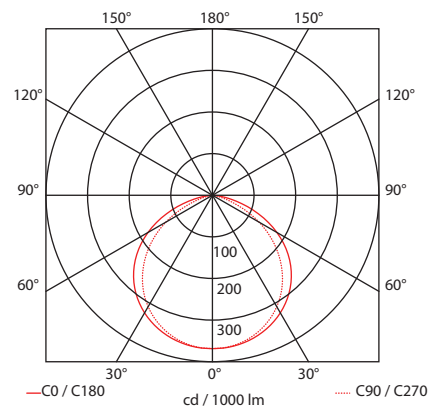

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

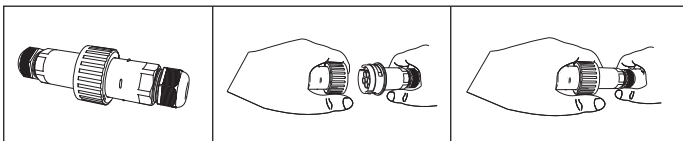

**WARNING:** In all ground buried lighting fittings installation, at least 20 cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

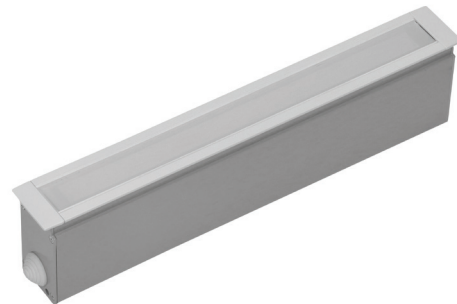

Standard color **18**

Available colors upon request

**01** **02** **30**

**i** \*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

**■** warm 2700 Kelvin **■** warm white 3000 Kelvin **■** neutral white 4000 Kelvin