

Frame Ceiling Led 2 CV

concrete version



- Linear ceiling recessed waterproof led luminaire
- with frame
- suitable for outdoors use
- body made from extruded aluminum polyester powder coated
- with die cast aluminum end caps polyester powder coated
- with tempered opal/mat glass
- with rubber gaskets and stainless-steel screws
- with one or two cable glands IP68
- with pre-connected male and female IP68 fis fast connection
- with incorporated high-power led smd
- adjusted on a high performance linear heatsink
- for best thermal management of led source
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with symmetric lenses 10°-15°-25°-35°-45°-60°*
- or elliptical beam lenses 15°x35°, 20x40°*
- or wall washing lenses
- input forward voltage 24v DC
- works with external/remote constant voltage led driver
- accommodated with extruded aluminum base for concrete installation






CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam


23822		7.0W	7x1.0W	24v DC	3000-4000 KELVIN	560-595 LUMEN	DIM (1)		
23823		14.0W	14x1.0W	24v DC	3000-4000 KELVIN	1120-1190 LUMEN	DIM (2)		
23824		21.0W	21x1.0W	24v DC	3000-4000 KELVIN	1680-1785 LUMEN	DIM (3)		
23825		28.0W	28x1.0W	24v DC	3000-4000 KELVIN	2240-2380 LUMEN	DIM (4)		



ΔΙΑΣΤΑΣΕΙΣ DIMENSIONS			ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	A	B	LENGTH	WIDTH	DEPTH
1	327	309	319	45	85
2	607	589	599	45	85
3	887	869	879	45	85
4	1167	1149	1159	45	85

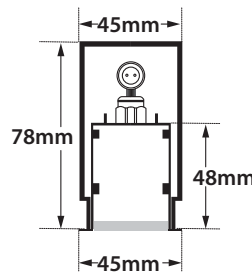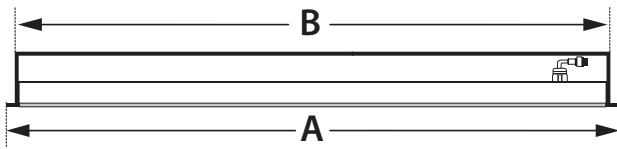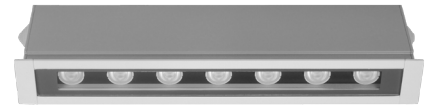

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

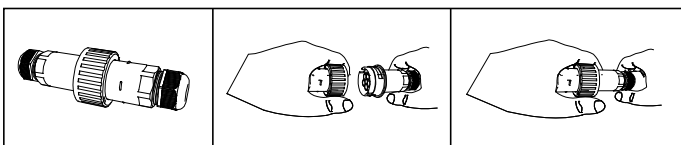

Standard color 18

Available colors upon request 01 02 30



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin