

## FUTURA CL 1



- Σποτ μόνο οροφής led εσωτερικού χώρου
- κατάλληλο για τοποθέτηση σε οροφή
- χυτό αλουμινίου
- κινητό οριζοντίως  $\pm 30^\circ$  και καθέτως  $\pm 30^\circ$
- με ενσωματωμένο 1 COB LED ισχύος
- ενσωματωμένο σε ψήκτρα υψηλής απόδοσης
- για την καλύτερη διαχείριση θερμότητας του led
- CRI>80 | 3 SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI 95+
- σε θερμοκρασία χρώματος 3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
- με ανακλαστήρα υψηλής απόδοσης
- με δέσμη  $13^\circ$ - $20^\circ$ - $38^\circ$ - $45^\circ$  μοιρών
- λειτουργεί με ενσωματωμένο led driver on/off
- κατόπιν παραγγελίας dimmable phase cut/1-10v/Dali

- Ceiling mounted single led luminaire
- for indoors use
- movable horizontally  $\pm 30^\circ$  and vertically  $\pm 30^\circ$
- from die cast aluminum
- with incorporated 1 cob led source
- adjusted on a high performance heatsink
- for best thermal management of led source
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90 & CRI 95+
- in 3000-4000 Kelvin
- upon request in 2700-3500-5000-6500 Kelvin
- with high performance reflector
- available with  $13^\circ$ - $20^\circ$ - $38^\circ$ - $45^\circ$  beam angle
- with built in led driver on/off as standard
- upon request dimmable phase cut/1-10v/Dali

## CRI&gt;80 | Power and Luminous flux



Final lumen output depends on the selection of the angle beam

25867		12.5W	220-240v	3000-4000 KELVIN	1350-1451 LUMEN			
25868		14.0W	220-240v	3000-4000 KELVIN	1550-1650 LUMEN			
25869		15.5W	220-240v	3000-4000 KELVIN	1687-1787 LUMEN			
25870		17.5W	220-240v	3000-4000 KELVIN	1855-1955 LUMEN			
25871		21.0W	220-240v	3000-4000 KELVIN	2186-2286 LUMEN			

167X167mm



100mm

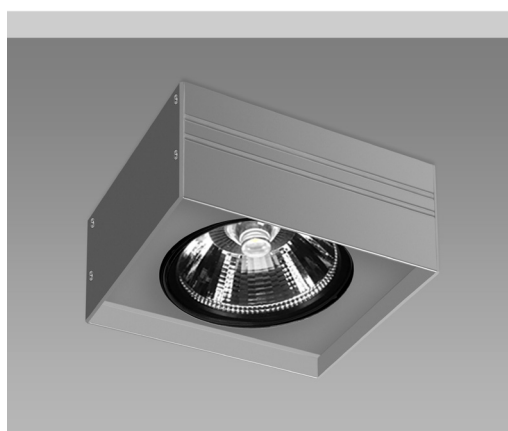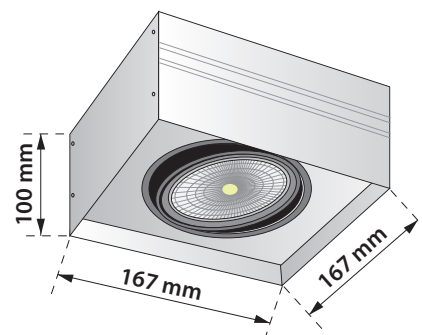

Κινητό οριζοντίως  $\pm 30^\circ$   
και καθέτως  $\pm 30^\circ$   
Movable horizontally  $\pm 30^\circ$   
and vertically  $\pm 30^\circ$

## Accessories upon request

Honey comb  
louvreSmooth  
FilterElliptical  
Filter