

FUTURA CL 2



- Σποτ διπλό οροφής led εσωτερικού χώρου
- κατάλληλο για τοποθέτηση σε οροφή
- χυτό αλουμίνιου
- κινητό οριζοντίως $\pm 30^\circ$ και καθέτως $\pm 30^\circ$
- με ενσωματωμένα 2 COB LED ισχύος
- ενσωματωμένα σε ψήκτρα υψηλής απόδοσης
- για την καλύτερη διαχείριση θερμότητας του led
- CRI>80 | 3 SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI 95+
- σε θερμοκρασία χρώματος 3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
- με ανακλαστήρα υψηλής απόδοσης
- με δέσμη 13° - 20° - 38° - 45° μοιρών
- λειτουργεί με ενσωματωμένο led driver on/off
- κατόπιν παραγγελίας dimmable phase cut/1-10v/Dali

- Ceiling mounted double led luminaire
- for indoors use
- movable horizontally $\pm 30^\circ$ and vertically $\pm 30^\circ$
- from die cast aluminum
- with incorporated 2 cob led sources
- adjusted on a high performance heatsinks
- for best thermal management of led sources
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90 & CRI 95+
- in 3000-4000 Kelvin
- upon request in 2700-3500-5000-6500 Kelvin
- with high performance reflector
- available with 13° - 20° - 38° - 45° beam angle
- with built in led driver on/off as standard
- upon request dimmable phase cut/1-10v/Dali

CRI>80 | Power and Luminous flux


Final lumen output depends on the selection of the angle beam

25872	2x12.5W 220-240v	3000-4000 KELVIN	2x(1350-1451) LUMEN	⏏ ⏏ ⏏
25873	2x14.0W 220-240v	3000-4000 KELVIN	2x(1550-1650) LUMEN	⏏ ⏏ ⏏
25874	2x15.5W 220-240v	3000-4000 KELVIN	2x(1687-1787) LUMEN	⏏ ⏏ ⏏
25875	2x17.5W 220-240v	3000-4000 KELVIN	2x(1855-1955) LUMEN	⏏ ⏏ ⏏
25876	2x21.0W 220-240v	3000-4000 KELVIN	2x(2186-2286) LUMEN	⏏ ⏏ ⏏

407X167mm

100mm

CE IP20

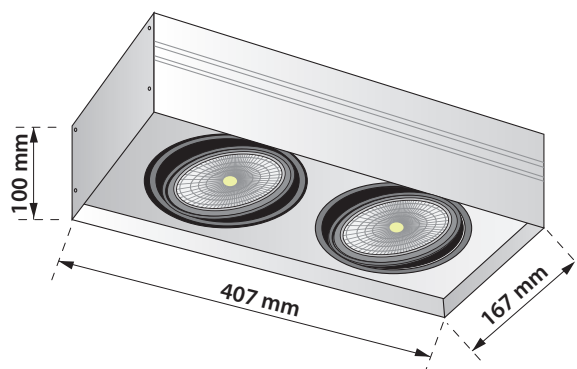

Κινητό οριζοντίως $\pm 30^\circ$
και καθέτως $\pm 30^\circ$
Movable horizontally $\pm 30^\circ$
and vertically $\pm 30^\circ$

Accessories upon request

