

- > Linear ceiling recessed waterproof led luminaire
- > with frame
- > suitable for outdoors use
- > body made from extruded aluminum polyester powder coated
- > with die cast aluminum end caps polyester powder coated
- > with tempered opal/mat glass
- > with rubber gaskets and stainless-steel screws
- > with one or two cable glands IP68
- > with pre-connected male and female IP68 fis fast connection
- > with incorporated high-power led smd
- > adjusted on a high performance linear heatsink
- > for best thermal management of led source
- > CRI>80 | 3 SDCM as standard
- > upon request available with CRI>90
- > in 3000-4000 KELVIN
- > also available upon request in 2700-3500-5000-6500 Kelvin
- > with symmetric lenses 10°-15°-25°-35°-45°-60°*
- > or elliptical beam lenses 15°x35°, 20x40°*
- > or wall washing lenses
- > input forward current 350mA
- > works with external/remote constant current led driver
- > accommodated with springs for plaster installation



CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam


23836		7.0W	7x1.0W	350mA	3000-4000 KELVIN	560-595 LUMEN	DIM (1)		
23837		14.0W	14x1.0W	350mA	3000-4000 KELVIN	1120-1190 LUMEN	DIM (2)		
23838		21.0W	21x1.0W	350mA	3000-4000 KELVIN	1680-1785 LUMEN	DIM (3)		
23839		28.0W	28x1.0W	350mA	3000-4000 KELVIN	2240-2380 LUMEN	DIM (4)		



ΔΙΑΣΤΑΣΕΙΣ DIMENSIONS		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS	
DIM (1)	327mmx45mm		312mmx36x65mm
DIM (2)	607mmx45mm		592mmx36x65mm
DIM (3)	887mmx45mm		872mmx36x65mm
DIM (4)	1167mmx45mm		1152mmx36x65mm

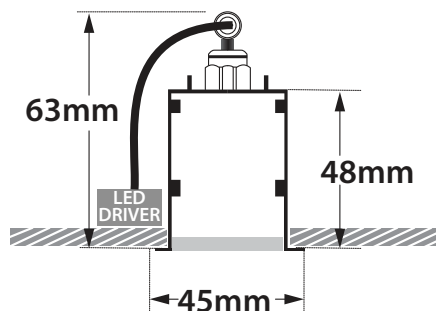

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

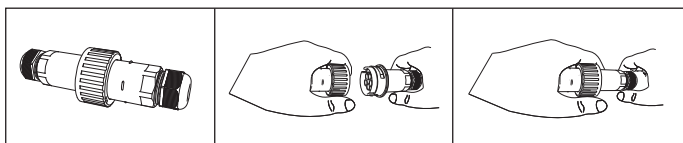

Standard color 18

Available colors upon request

01 02 30



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin