


Frame Ceiling Led 2 CV

plaster version

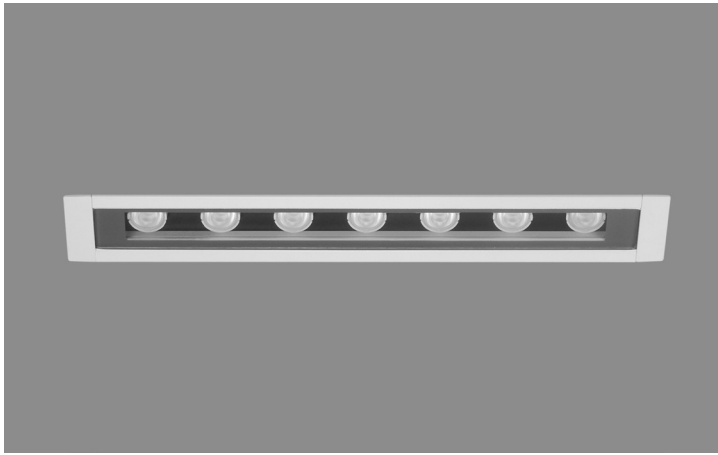


- Linear ceiling recessed waterproof led luminaire
- with frame
- suitable for outdoors use
- body made from extruded aluminum polyester powder coated
- with die cast aluminum end caps polyester powder coated
- with tempered opal/mat glass
- with rubber gaskets and stainless-steel screws
- with one or two cable glands IP68
- with pre-connected male and female IP68 fis fast connection
- with incorporated high-power led smd
- adjusted on a high performance linear heatsink
- for best thermal management of led source
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- in 3000-4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with symmetric lenses 10°-15°-25°-35°-45°-60°*
- or elliptical beam lenses 15°x35°, 20x40°*
- or wall washing lenses
- input forward voltage 24v DC
- works with external/remote constant voltage led driver
- accommodated with springs for plaster installation



CRI>80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam


23840		7.0W 7x1.0W 24v DC 3000-4000 KELVIN 560-595 LUMEN DIM (1)		
23841		14.0W 14x1.0W 24v DC 3000-4000 KELVIN 1120-1190 LUMEN DIM (2)		
23842		21.0W 21x1.0W 24v DC 3000-4000 KELVIN 1680-1785 LUMEN DIM (3)		
23843		28.0W 28x1.0W 24v DC 3000-4000 KELVIN 2240-2380 LUMEN DIM (4)		



ΔΙΑΣΤΑΣΕΙΣ DIMENSIONS			ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	A	B	LENGTH	WIDTH	DEPTH
1	327	309	312	36	65
2	607	589	592	36	65
3	887	869	872	36	65
4	1167	1149	1152	36	65

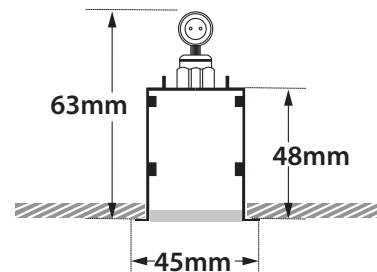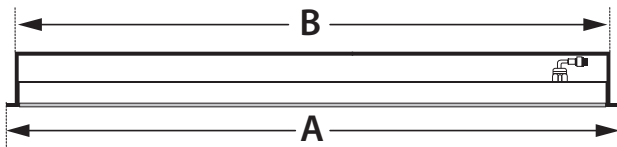

Upon request luminaire is available with pre-connected IP68 male and female fis for fast connection

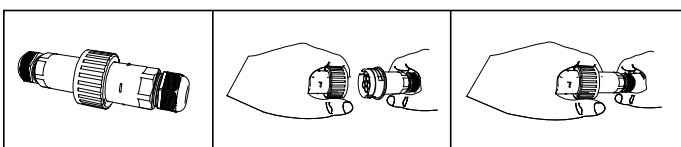

Standard color **18**

Available colors upon request **01** **02** **30**



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin