

Technoline Slim 7 LLE






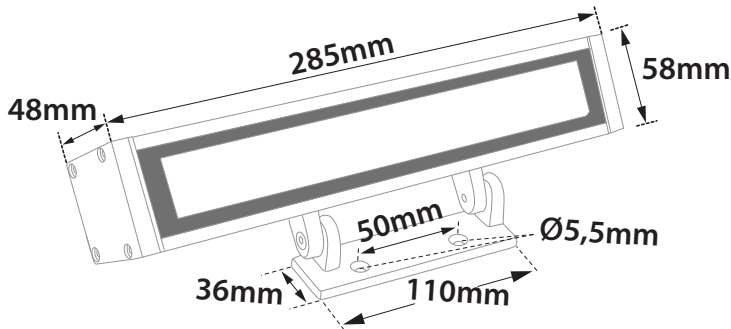
- Linear wall fixed led luminaire
- waterproof, suitable for exteriors use
- suitable for diffuse lighting effect
- with brackets at the two sides
- for capability of movement ±90°
- from extruded aluminum
- polyester powder coated
- suitable for resistance under harsh environment conditions
- with protective tempered opal glass 5 mm thick
- **90° beam angle**
- with silicon gaskets and inox screws
- with incorporated linear smd led modules
- adjusted on a high performance linear heatsink
- for best thermal management of led sources
- CRI>80| 3 SDCM as standard
- upon request available with CRI>90
- 3000-4000 Kelvin, as standard
- upon request available in 2700-3500-5000-6500 Kelvin
- works with built in led driver, on/off as standard
- upon request dimmable Phase cut/1-10v/Dali
- with 1 or 2 cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection

CRI>80 | Power & Luminous Flux



23914  8.2W | 220-240V | 3000 - 4000 KELVIN | 637 - 688 LUMEN  

23915  11.0 W | 220-240V | 3000 - 4000 KELVIN | 837 - 903 LUMEN  

 58x48mm  285mm GLASS  (5mm)  



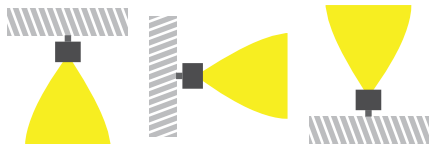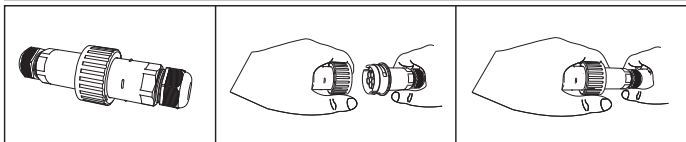


With pre-connected IP68 male and female fis for fast connection



Καρφωτά στηρίγματα εδάφους διαθέσιμα κατόπιν παραγγελίας

Ground spikes available upon request

	Καρφι PVC PVC spike 5083
	Καρφι αλουμινίου Die cast aluminum spike 5019
	Καρφι inox Inox ground spike 5018

01 02 05 18

Βαμμένα με Πολυεστερική Ηλεκτροστατική Βαφή
Painted with Polyester Electrostatic Powder



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin