


Axon165 SQ 2

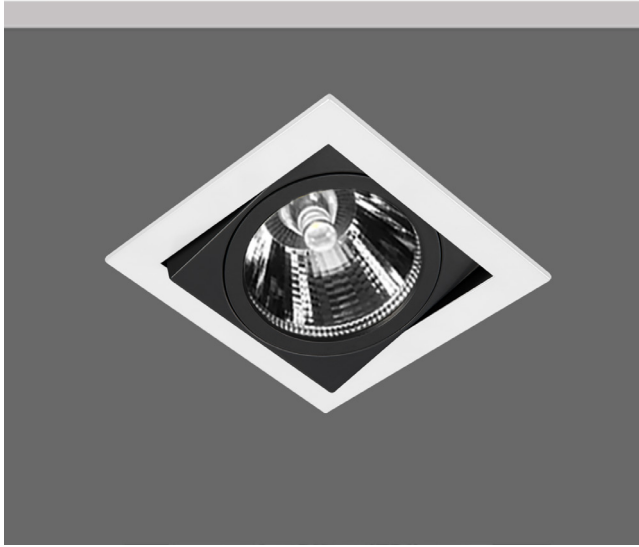

- Σποτ led χωνευτό οροφής
- εσωτερικού χώρου
- αλουμινίου
- κινητό ±30°
- με ενσωματωμένο 1 COB LED ισχύος
- τοποθετημένο σε ψήκτρα υψηλής απόδοσης
- για την καλύτερη διαχείρισης θερμότητας του led
- CRI>80 | 3SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI 95+
- κατόπιν παραγγελίας με 2 SDCM
- σε θερμοκρασία χρώματος 3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
- με ανακλαστήρα υψηλής απόδοσης
- με δέσμη 13°-20°-38°-45°
- λειτουργεί με συνοδευτικό led driver on/off
- ή dimmable phase cut / Dali / 1-10volt


- Recessed led spotlight
- for indoors use
- from die cast aluminum
- movable ±30°
- with incorporated 1 Cob Led source
- adjusted on a high performance heatsink
- for best thermal management of the led source
- CRI>80 | 3 SDCM | as standard
- upon request available with CRI>90 & CRI 95+
- upon request available with 2 SDCM
- in 3000-4000 Kelvin
- upon request in 2700-3500-5000-6500 Kelvin
- with high performance reflector
- available with 13°-20°-38°-45°beam angle
- works with remote led driver
- on/off as standard
- upon request dimmable phase cut/Dali/1-10volt

CRI>80 | Power and Luminous flux

Final lumen output depends on the selection of the angle beam

40510	11.0W	220-240V	3000-4000 KELVIN	1250-1349 LUMEN	⚡ ⚠
40511	12.5W	220-240V	3000-4000 KELVIN	1350-1451 LUMEN	⚡ ⚠
40512	14.0W	220-240V	3000-4000 KELVIN	1550-1650 LUMEN	⚡ ⚠
40513	15.5W	220-240V	3000-4000 KELVIN	1687-1787 LUMEN	⚡ ⚠
40514	17.5W	220-240V	3000-4000 KELVIN	1855-1955 LUMEN	⚡ ⚠
40515	21.0W	220-240V	3000-4000 KELVIN	2186-2286 LUMEN	⚡ ⚠

165x165mmmm 145X145mm 60mm CE IP20



Movable



Κινητό ±30°
Movable ±30°

Accessories upon request



Honey comb
louvre



Smooth
Filter



Elliptical
Filter

