

## Line 46 DARKLINE 4 OUT



- Γραμμικό LED φωτιστικό εξωτερικό
  - εσωτερικού χώρου
  - κατάλληλο για τοποθέτηση σε οροφή
  - ή κρεμαστό με kit ανάρτησης\*
  - από προφίλ αλουμινίου
  - με ενσωματωμένα High Power Led τεχνολογίας Smd
  - τοποθετημένα σε γραμμική ψήκτρα
  - για καλύτερη διαχείριση της θερμοκρασίας
  - τοποθετημένα σε ειδικό οπτικό, σε μαύρο χρώμα
  - για μείωση της θάμβωσης
  - με εσωτερικό φακό 90°\*
  - κατόπιν παραγγελίας σε 65°\*\* και σε ασύμμετρη δέση\*\*\*
  - σε θερμοκρασία χρώματος 3000K - 4000K
  - κατόπιν παραγγελίας διατίθεται και σε 5000K-6500K
  - CRI>80 | 3SDCM
  - κατόπιν παραγγελίας σε CRI>90
  - λειτουργεί με ενσωματωμένο LED driver on/off
  - κατόπιν παραγγελίας dimmable phase cut/Dali/1-10v
- Linear led luminaire
  - surface mounted or suspended with suspension kit\*
  - for indoors use
  - from extruded aluminum powder coated
  - with incorporated High Power Led Smd technology
  - adjusted on a linear cooling system
  - for best heat management
  - adjusted inside a special black anti-glare optical screen
  - suitable for darklight effect
  - with internal symmetric lens 90°\*
  - upon request with angle beam of 65°\*\* or asymmetric\*\*\*
  - in 3000K or 4000K
  - upon request with 5000K-6500K
  - CRI>80 | 3SDCM as standard
  - upon request with CRI>90
  - works with built in led driver on/off as standard
  - upon request dimmable phase cut/Dali/1-10v

## PHOTOMETRIC DATA | CRI&gt; 80 | BEAM ANGLE 90°


CODE	EXTERNAL DIMENSIONS LENGTH (mm)	POWER WATT	VERSION 1		VERSION 2		VERSION 3			
			LUMINOUS FLUX 3000K	LUMINOUS FLUX 4000K	POWER WATT	LUMINOUS FLUX 3000K	LUMINOUS FLUX 4000K	POWER WATT	LUMINOUS FLUX 3000K	LUMINOUS FLUX 4000K
41048	171	4.5	565	595	6.6	795	840	9.6	1090	1155

## PHOTOMETRIC DATA FOR BEAM ANGLE 65° + 1.012% | ASYMMETRIC ANGLE -0.14%




## SUSPENSION KIT


Composed by 2-5 pcs (depending from the length of luminaire) of steel wire with length 1.20m standard length (upon request available in longer lengths) assembled to fitting with all necessary components for ceiling installation, with 1.50m long power supply cable 3x0.75mm transparent-white-black-grey (upon request available in longer lengths), connected to fitting, and 1 pcs of round die cast aluminum ceiling base, painted in same color with luminaire, with external diameter d=60mm and height=15mm.




\*Wide 90°



\*\*Medium 65°



\*\*\*Asymmetric

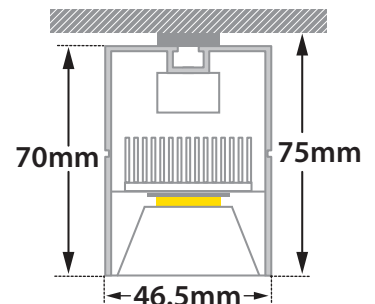

01 02 18

Βαμμένα με Ηλεκτροστατική Βαφή  
Painted with Electrostatic Powder

\*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο  
LED technology changes constantly forward, so before selecting / ordering the most suitable product for you,  
ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin