


Line 68 In 1L Microprism

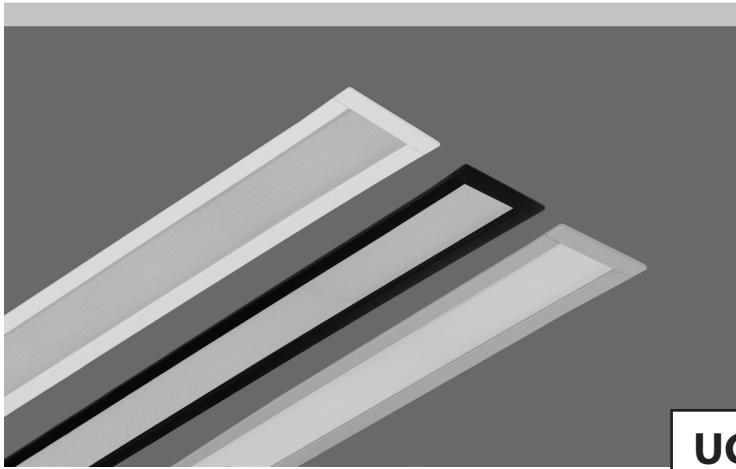


**UGR
≤19**

- Γραμμικό φωτιστικό χωνευτό οροφής εσωτερικού χώρου
 - από προφίλ αλουμινίου
 - με πολυκαρμπονικό κάλυμμα ματ μικροπρισματικό
 - για μείωση της θάμβωσης
 - UGR<19
 - με ενσωματωμένο Linear Led Modules
 - τοποθετημένα σε γραμμική ψήκτρα
 - για καλύτερη διαχείριση της θερμοκρασίας
 - CRI>85 | 3 SDCM
 - σε θερμοκρασίας χρώματος 3000-4000 Kelvin
 - κατόπιν παραγγελίας και σε 2700-5000-6500 Kelvin
 - κατόπιν παραγγελίας και με CRI>90+
 - λειτουργεί με ενσωματωμένο LED driver on/off
 - κατόπιν παραγγελίας dimmable phase cut/Dali/1-10v
- Linear led recessed ceiling luminaire for indoors use
 - from extruded aluminum powder coated
 - with micro-prismatic polycarbonate mat cover
 - for reduce of glare
 - UGR<19
 - with incorporated Linear Led Modules
 - adjusted on a linear cooling system
 - for best heat management
 - CRI>85+ | 3 SDCM as standard
 - upon request available with CRI>90+
 - CCT 3000-4000 Kelvin
 - upon request also available in 2700-5000-6500 Kelvin
 - works with built in LED driver on/off as standard
 - upon request dimmable phase cut/Dali/1-10v

CRI>80 | Power and luminous flux

CODE	EXTERNAL DIMENSIONS		CUTTING DIMENSIONS		HEIGHT mm	POWER WATT	LUMINOUS FLUX 3000 KELVIN	LUMINOUS FLUX 4000 KELVIN
	LENGTH mm	WIDTH mm	LENGTH mm	WIDTH mm				
41136	605	68	595	57	70	11	836	880
41137	885	68	875	57	70	16,5	1254	1320
41138	1165	68	1155	57	70	22	1672	1760
41139	1445	68	1435	57	70	27,5	2090	2200
41140	1735	68	1725	57	70	33	2508	2640
41141	2015	68	2005	57	70	38,5	2926	3080
41142	2295	68	2285	57	70	44	3344	3520
41143	2575	68	2565	57	70	49,5	3762	3960
41144	2855	68	2845	57	70	55	4180	4400
41145	3145	68	3135	57	70	60,5	4598	4840
41146	3425	68	3415	57	70	66	5016	5280
41147	3705	68	3695	57	70	71,5	5434	5720
41148	3985	68	3975	57	70	77	5852	6160
41149	4265	68	4255	57	70	82,5	6270	6600
41150	4545	68	4535	57	70	88	6688	7040

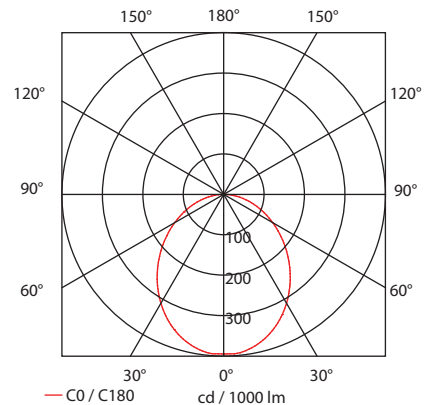

Linear Led Module

