


## Technoline 8 Asymmetric High

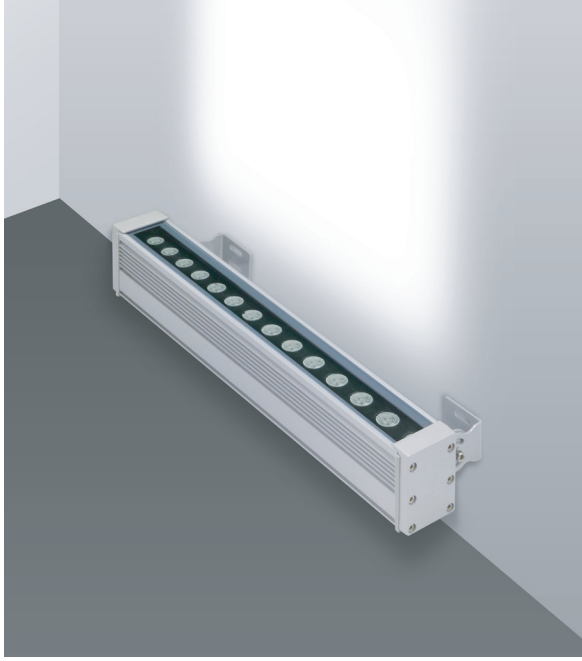



- Linear led lighting fitting
- wall fixed mounted
- waterproof suitable for exteriors use
- from extruded aluminum polyester powder coated
- suitable for resistance in external spaces
- with incorporated High Power Led Smd technology
- CRI>80 | 3 SDCM |as standard
- upon request available with CRI>90
- adjusted on a linear cooling system for best thermal management
- in 2700K-3000K-4000K color temperature
- upon request also available in 3500K-5000K and 6500K
- with lenses asymmetrical beam angle
- work with built in led driver, on/off as standard
- upon request available with dimmable led driver
- phase cut/Dali/1-10volt
- with 1 or 2 cable glands PG9 IP68 or PG11 IP68
- for input and output of power supply cables
- with brackets at the two sides for capability of movement
- with silicon gaskets and inox screws
- upon request is offered with pre-fitted cable in neoprene
- with male and female fis fast connection with IP68 protection
- suitable for exterior lighting of building facades, windows

## CRI&gt; 80 | System power &amp; Luminaire Flux

23942		14.0W		7x2.0W		220-240V		2700-3000-4000 KELVIN		1244-1310-1411 LUMEN	LENGTH=315mm	
23943		28.0W		14x2.0W		220-240V		2700-3000-4000 KELVIN		2488-2620-2822 LUMEN	LENGTH=615mm	
23944		42.0W		21x2.0W		220-240V		2700-3000-4000 KELVIN		3732-3930-4233 LUMEN	LENGTH=915mm	
23945		56.0W		28x2.0W		220-240V		2700-3000-4000 KELVIN		4976-5240-5644 LUMEN	LENGTH=1215mm	
23946		70.0W		35x2.0W		220-240V		2700-3000-4000 KELVIN		6220-6550-7055 LUMEN	LENGTH=1515mm	

GLASS (5mm)

CE

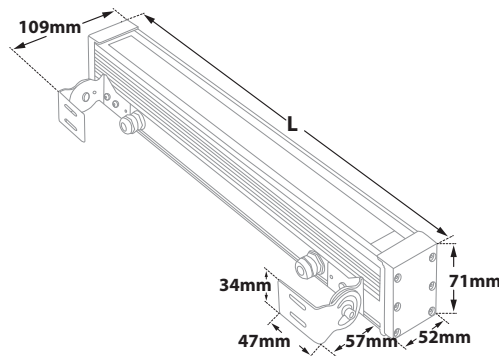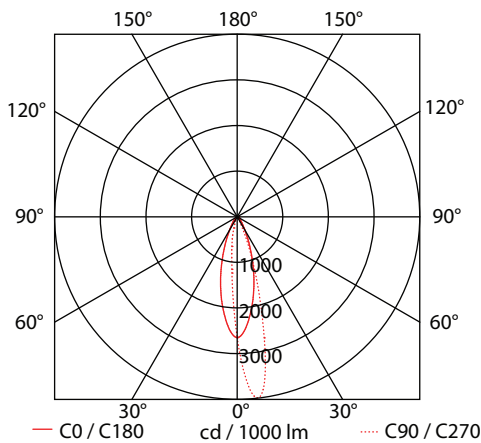

Upon request luminaire is available  
with pre-connected IP68 male  
and female fis for fast connection



Standard color 18

Available colors upon request 01 02



LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

— warm 2700 Kelvin — warm white 3000 Kelvin — neutral white 4000 Kelvin