

- Linear inground recessed waterproof led luminaire
- suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with protective heavy duty inox (stainless steel) frame
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink
- for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- In 3000 - 4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of symmetrical beam angle 10°-15°-24°-28°-32°-41°-48°-63°
- or with lenses of elliptical beam angle 15°x35°, 22°x37°
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection

CRI>80 | Power & Luminous Flux at 28°

For information regarding other beam angles use the table factors for lumen output

30707	12.6W	7x1.80W	220-240V	3000-4000 KELVIN	1002-1070 LUMEN	DIM (1)	⚠ ⚠ ⚠
30708	25.2W	14x1.80W	220-240V	3000-4000 KELVIN	2003-2140 LUMEN	DIM (2)	⚠ ⚠ ⚠
30709	37.8W	21x1.80W	220-240V	3000-4000 KELVIN	3005-3210 LUMEN	DIM (3)	⚠ ⚠ ⚠
30710	50.4W	28x1.80W	220-240V	3000-4000 KELVIN	4007-4278 LUMEN	DIM (4)	⚠ ⚠ ⚠

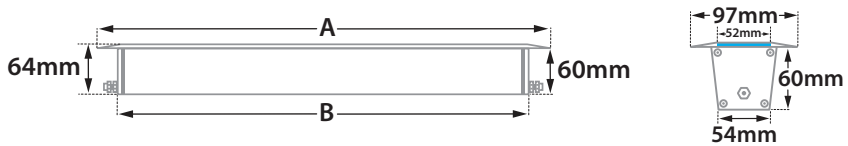
GLASS (8mm)

CE IP67

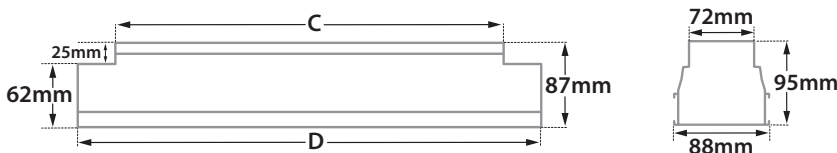

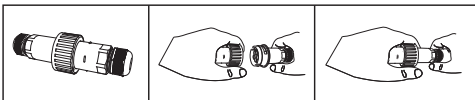
Beam angle	Factor
10°	0.86
15°	0.97
24°	0.96
28°	1.00
32°	0.86
41°	0.91
48°	0.89
63°	0.88
15°x35°	0.93
22°x37°	0.82

ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
[1]	30707	473mm	319mm	342mm	426mm	439mm	100mm	95mm
[2]	30708	713mm	615mm	648mm	732mm	745mm	100mm	95mm
[3]	30709	1113mm	915mm	978mm	1062mm	1075mm	100mm	95mm
[4]	30710	1313mm	1215mm	1278mm	1362mm	1375mm	100mm	95mm

ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS



ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

5339 IP68 RATED MULTI-WAY CONNECTOR BOX
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣWith pre-connected IP68
male and female fis for fast connection

ΠΡΟΣΟΧΗ: Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέυσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.