



Terra Line Led 9 Asymmetric

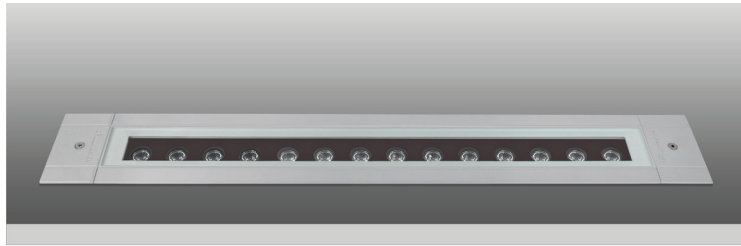


- Linear inground recessed waterproof led luminaire suitable for outdoors use
- made from extruded anodized aluminum body
- painted with polyester powder suitable for external use
- with ground base from aluminum
- with heavy duty protective glass 8mm thick
- with incorporated high power led smd
- adjusted on high performance linear heatsink for best heat management
- CRI>80 | 3 SDCM as standard
- upon request available with CRI>90
- In 3000 - 4000 KELVIN
- also available upon request in 2700-3500-5000-6500 Kelvin
- with lenses of asymmetrical beam angle
- works with built in led driver, on/off as standard
- upon request dimmable phase cut/Dali/1-10v
- with silicone gaskets and stainless-steel screws
- with 1 or 2 brass nickel plated cable glands IP68
- for input and output of power supply cables
- offered with pre-fitted neoprene cable
- with male and female fis fast connection with IP68 protection

CRI>80 | Power & Luminous Flux

30703	12.6W	7x1.80W	220-240V	3000-4000 KELVIN	1022-1092 LUMEN	DIM (1)	⚠ ⚠ ⚠
30704	25.2W	14x1.80W	220-240V	3000-4000 KELVIN	2043-2183 LUMEN	DIM (2)	⚠ ⚠ ⚠
30705	37.8W	21x1.80W	220-240V	3000-4000 KELVIN	3065-3275 LUMEN	DIM (3)	⚠ ⚠ ⚠
30706	50.4W	28x1.80W	220-240V	3000-4000 KELVIN	4086-4367 LUMEN	DIM (4)	⚠ ⚠ ⚠

GLASS (8mm)


CE IP67

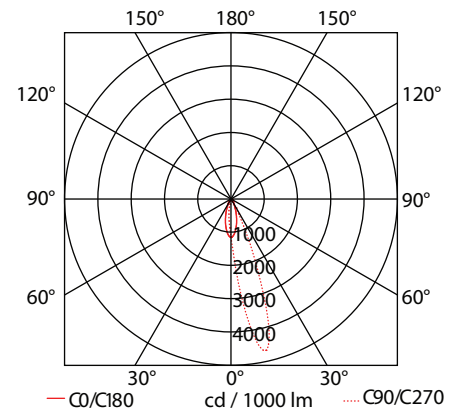


ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
1	30703	406mm	315mm	391mm	406mm	419mm	80mm	125mm
2	30704	702mm	611mm	687mm	702mm	715mm	80mm	125mm
3	30705	1002mm	911mm	987mm	1002mm	1015mm	80mm	125mm
4	30706	1302mm	1211mm	1287mm	1302mm	1315mm	80mm	125mm

i *upon request available at length 1545mm



ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS

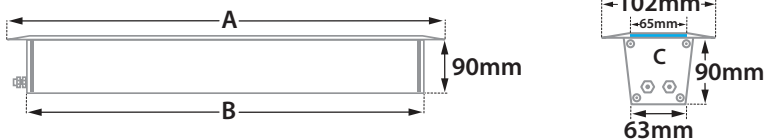

ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

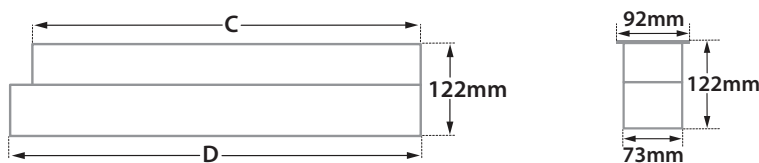

With pre-connected IP68 male and female fis for fast connection



ΠΡΟΣΟΧΗ: Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.



5339 IP68 RATED MULTI-WAY CONNECTOR BOX
ΣΤΕΦΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

