

## Tube 62 TR



- Σποτ led εσωτερικού χώρου
  - κατάλληλος για τοποθέτηση σε ράγα
  - χυτός αλουμινίου
  - βαμμένος με ηλεκτροστατική πούδρα
  - περιστρεφόμενος οριζοντίως 355° και καθέτως ±90°
  - με ενσωματωμένο 1 COB LED ισχύος
  - τοποθετημένο σε ψήκτρα υψηλής απόδοσης
  - για την καλύτερη διαχείριση θερμότητας του led
  - CRI>80 | 3 SDCM
  - κατόπιν παραγγελίας με CRI>90 & CRI 95+
  - κατόπιν παραγγελίας με 2 SDCM
  - σε 2700-3000-4000 Kelvin
  - κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
  - με ανακλαστήρα ή φακό υψηλής απόδοσης
  - με δέσμη 15°-25°-40°
  - με ενσωματωμένο led driver on/off
- Indoor track mounted led spotlight
  - from die cast aluminum
  - painted with electrostatic powder
  - rotatable horizontally 355° and head tiltable 0-90°
  - with incorporated 1 COB LED
  - adjusted on a high performance heatsink
  - for best thermal management of led source
  - CRI>80 | 3SDCM as standard
  - upon request available with CRI>90 & CRI 95+
  - upon request available with 2 SDCM
  - in 2700-3000-4000 Kelvin
  - upon request in 3500-5000-6500 Kelvin
  - with high performance reflector or lens
  - available with 15°-25°-40° beam angle
  - with built in on/off led driver as standard

### CRI>80 | Led source power and Average Luminous flux



Final lumen output depends on the selection of the angle beam

System power depends on the selection of the led driver

29748		5.0W   220-240V   2700-3000-4000 KELVIN   425 - 450 - 475 LUMEN			
29749		7.5W   220-240V   2700-3000-4000 KELVIN   635 - 675 - 712 LUMEN			
29750		9.0W   220-240V   2700-3000-4000 KELVIN   765 - 810 - 855 LUMEN			
29751		10.5W   220-240V   2700-3000-4000 KELVIN   890 - 945 - 995 LUMEN			
29752		12.0W   220-240V   2700-3000-4000 KELVIN   1010-1070-1130 LUMEN			

∅ 62mm

↑↓ 170mm

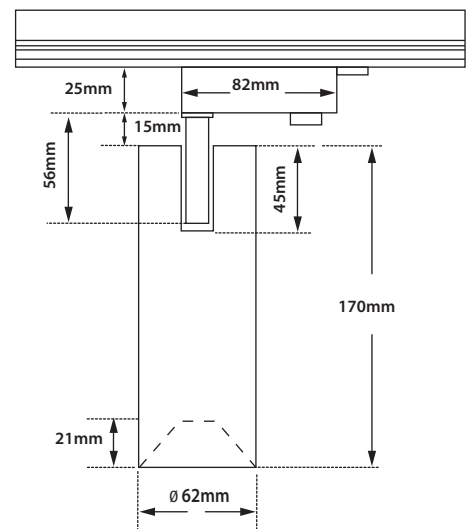

### Accessories upon request



Honey comb louvre



Smooth Filter



Elliptical Filter