





Mini Faros INOX CL RD



Fixed

INDICATIVE LED TABLE *CRI>80


32000	 1.0W 350ma 2700-3000-4000 KELVIN 85-90-100 LUMEN  
32001	 1.5W 500ma 2700-3000-4000 KELVIN 115-120-130 LUMEN  
32002	 2.0W 700ma 2700-3000-4000 KELVIN 150-155-165 LUMEN  

∅ 70mm  62mm  72mm  



31 INOX/STAINLESS STEEL

- > Φωτιστικό χωνευτό οροφής
- > στεγανό με βαθμό προστασίας IP65
- > κατάλληλο για χρήση σε εξωτερικούς χώρους και εσωτερικούς χώρους
- > σώμα από ορείχαλκο
- > στεφάνι ανοξείδωτο (INOX)
- > σταθερό
- > με υάλινο προφυλακτήρα tempered
- > διάφανο ή ματ πάχους 5mm
- > ή κατόπιν παραγγελίας με πάχος 8mm
- > με ελαστικά στεγανοποίησης από σιλικόνη
- > με βίδες inox
- > και στυπιοθλίπτη ορειχάλκινο PG7 IP68
- > με ενσωματωμένο 1 High power led τεχνολογίας SMD LM80, CRI>80
- > κατόπιν παραγγελίας με CRI>90 & CRI 98+
- > σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
- > κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
- > με ανακλαστήρα αλουμινίου υψηλής απόδοσης
- > με δέσμη στενή-μεσαία-ευρεία-πολύ ευρεία
- > με ενσωματωμένη ψήκτρα υψηλής απόδοσης
- > για την καλύτερη διαχείριση θερμότητας του led
- > λειτουργεί με εξωτερικό συνοδευτικό led driver on/off ή dimmable phase cut / Dali / 1-10volt
- > Recessed waterproof spotlight
- > With IP65 protection
- > suitable for outdoors and indoors use
- > body made from Brass
- > flange made from stainless steel (INOX) fixed
- > with tempered glass transparent or mat
- > with 5mm thickness as standard
- > upon request with 8mm thickness
- > with silicon gaskets and inox screws
- > and brass nickel plated cable gland PG7 IP68
- > with incorporated 1 High power led SMD LM80, CRI>80
- > upon request available with CRI>90 & CRI 98+
- > in 2700-3000-4000 Kelvin
- > upon request in 3500-5000-6500 Kelvin
- > with high performance aluminum reflector
- > with high performance heatsink
- > for best heat management
- > available with narrow-medium-wide-extra wide beam
- > works with external/remote led driver on/off, dimmable phase cut/Dali/1-10volt

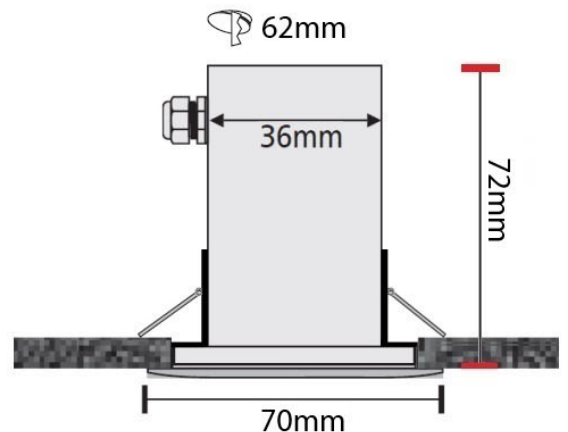

*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε πιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

 warm 2700 kelvin  warm white 3000 Kelvin  neutral white 4000 Kelvin