

Lip 110 Nova Mat



- Σποτ led χωνευτό οροφής
- εσωτερικού χώρου
- με μικρό εξωτερικό πλαίσιο
- αλουμινίου
- σταθερό
- βαμμένο ηλεκτροστατικά
- κατάλληλο για darklight αντιθαμβωτικό φωτισμό
- με υάλινο προφυλακτήρα tempered mat
- με ενσωματωμένο 1 COB LED ισχύος
- ενσωματωμένο σε ψήκτρα υψηλής απόδοσης
- για την καλύτερη διαχείριση θερμότητας του led
- CRI>80 | 3SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI>95+
- σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
- κατόπιν παραγγελίας με 2 SDCM
- με ανακλαστήρα υψηλής απόδοσης
- με δέσμη 60°-75°
- λειτουργεί με συνοδευτικό led driver on/off
- ή κατόπιν παραγγελίας dimmable phase cut / Dali / 1-10volt

- Recessed led spotlight
- for indoors use
- with small external trim
- from die cast aluminum
- painted with electrostatic powder
- fixed
- suitable for darklight (anti-dazzle) effect
- with tempered glass mat
- with incorporated 1 COB LED
- adjusted on a high performance heatsink
- for best heat management
- CRI>80| 3 SDCM as standard
- upon request available with CRI>90 & CRI>95+
- upon request available with 2 SDCM
- in 2700-3000-4000 Kelvin
- upon request in 3500-5000-6500 Kelvin
- with high performance reflector
- available with 60°-75° beam angle
- works with remote led driver, on/off as standard
- or upon request dimmable phase cut/Dali/1-10volt


CRI>80 | Power & Luminous Flux

Final lumen output depends on the selection of the angle beam


38112	7.5W	2700-3000-4000 KELVIN	645-675-705 LUMEN	⚡
38113	9.0W	2700-3000-4000 KELVIN	780-820-860 LUMEN	⚡
38114	11.0W	2700-3000-4000 KELVIN	925-965-1000 LUMEN	⚡
38115	12.75W	2700-3000-4000 KELVIN	1050-1100-1150 LUMEN	⚡
38116	10.5W	2700-3000-4000 KELVIN	1050-1080-1125 LUMEN	⚡
38117	12.0W	2700-3000-4000 KELVIN	1200-1250-1300 LUMEN	⚡
38118	14.0W	2700-3000-4000 KELVIN	1375-1410-1475 LUMEN	⚡
38119	15.5W	2700-3000-4000 KELVIN	1510-1570-1630 LUMEN	⚡
38120	17.5W	2700-3000-4000 KELVIN	1660-1730-1795 LUMEN	⚡
38121	19.5W	2700-3000-4000 KELVIN	1815-1890-1960 LUMEN	⚡



∅ 110mm 103mm 130-175mm CE IP23 FRONT




Fixed



Το παραπάνω φωτιστικό προσφέρεται κατόπιν παραγγελίας με μπροστινή προστασία IP44-IP54

i The above luminaire is available upon request with IP44-IP54 front protection

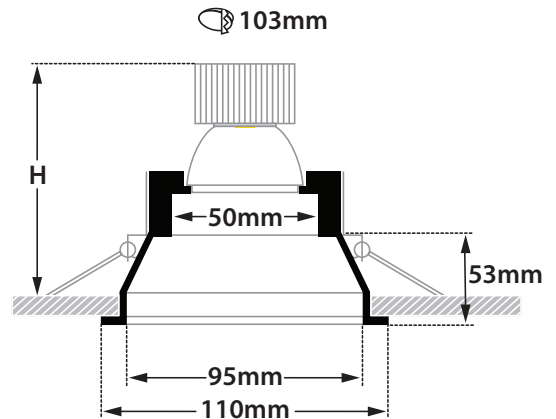

01 02 18

Βαμμένα με Ηλεκτροστατική Βαφή
Painted with Electrostatic Powder

i *Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο
LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin