

Mini Gemini 44 TR



- Προβολέας led εσωτερικού χώρου
- χυτός αλουμινίου
- βαμμένος με ηλεκτροστατική βαφή
- περιστρεφόμενος οριζοντίως 355° και καθέτως ±90°
- με ενσωματωμένο 1 LED ισχύος
- τοποθετημένο βαθιά στο εσωτερικό του σώματος για μείωση της θάμβωσης
- ενσωματωμένο σε ψήκτρα υψηλής απόδοσης για την καλύτερη διαχείριση θερμότητας του led
- CRI>80 | 3 SDCM
- κατόπιν παραγγελίας με CRI>90 & CRI 98+
- σε θερμοκρασία χρώματος 3000-4000 Kelvin
- κατόπιν παραγγελίας και σε 2700-3500-5000-6500 Kelvin
- με φακό υψηλής απόδοσης
- με δέσμη 15°-25°-40°
- με ενσωματωμένο led driver ράγας
- on/off ή dimmable phase cut/ Dali/1-10V

- Indoor track mounted led spotlight
- from die cast aluminum
- painted with electrostatic powder
- rotatable horizontally 355° and head tiltable 0-90°
- with incorporated 1 led source
- positioned deep inside the body for reduce of glare
- adjusted on a high performance heatsink for best thermal management of led source
- CRI>80 | 3SDCM as standard
- upon request available with CRI>90 & CRI 98+
- upon request available with 2 SDCM
- in 3000-4000 Kelvin
- upon request in 2700-3500-5000-6500 Kelvin
- with high performance lens
- available with 15°-25°-40° beam angle
- works with track led driver
- on/off or dimmable phase cut/1-10v/Dali

CRI>80 | Led source power & Luminous flux


Final lumen output depends on the selection of the angle beam

29604  7.5W | 220-240v | 2700-3000-4000 KELVIN | 620-660 -675 LUMEN

29605  9.0W | 220-240v | 2700-3000-4000 KELVIN | 745-790 -810 LUMEN

∅ 44mm

↕ 80mm



Accessories upon request




Smooth light filter 1



Smooth light filter 2



Honey comb louvre

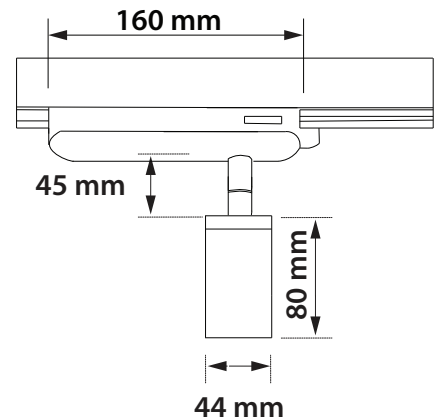

01 02

Βαμμένα με Ηλεκτροστατική Βαφή
Painted with Electrostatic Powder



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

■ warm 2700 Kelvin ■ warm white 3000 Kelvin ■ neutral white 4000 Kelvin