



## Linear Out Darklight

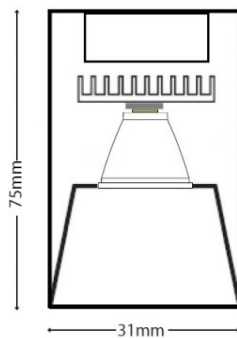

- Γραμμικό φωτιστικό οροφής ή κρεμαστό εσωτερικού χώρου
- από προφίλ αλουμινίου
- κατάλληλο για darklight φωτισμό
- με ενσωματωμένα High Power Led τεχνολογίας SMD
- τοποθετημένα σε γραμμική ψήκτρα
- σε θερμοκρασίας χρώματος 2700K-3000K-4000K
- κατόπιν παραγγελίας και σε 5000-6500 Kelvin
- LM80, CRI>80, κατόπιν παραγγελίας και με CRI>90
- με ανακλαστήρα αλουμινίου δέσμης 15° και 25°
- με ενσωματωμένο LED driver
- on/off, dimmable phase cut/Dali/1-10v

- Linear ceiling mounted or pendant fitting for indoors use
- suitable for darklight output
- from extruded aluminum powder coated
- with incorporated High Power Led SMD technology
- adjusted on a linear cooling system for heat management
- in 2700K-3000K-4000K color temperature
- upon request also available in 5000K and 6500K
- with aluminum darklight reflector 15° and 25°
- with incorporated LED driver
- on/off, dimmable phase cut/Dali/1-10v

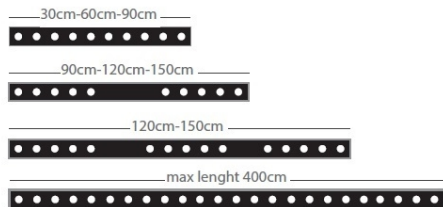

Also available in  
5000 & 6000 Kelvin upon request

**i** Κατόπιν παραγγελίας το φωτιστικό μπορεί να παραχθεί και σε μεγαλύτερα μήκη  
Upon request the above lighting fitting can be produced in longer lengths

**24245** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 30cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 305x31mm ↑ 75mm

**24246** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 60cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 20W | 10x2W 700mA | 2700-3000-4000 KELVIN | 1530-1620-1780 LUMEN  
 605x31mm ↑ 75mm

**24247** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 90cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 20W | 10x2W 700mA | 2700-3000-4000 KELVIN | 1530-1620-1780 LUMEN  
 905x31mm ↑ 75mm

**24248** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 90cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 20W | 10x2W 700mA | 2700-3000-4000 KELVIN | 1530-1620-1780 LUMEN  
 905x31mm ↑ 75mm

**24249** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 120cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 20W | 10x2W 700mA | 2700-3000-4000 KELVIN | 1530-1620-1780 LUMEN  
 1205x31mm ↑ 75mm

**24250** ●●●●●●●●●●  
**10 POWER LED WITH LENS | 150cm** length  
 10W | 10x1W 350mA | 2700-3000-4000 KELVIN | 840-890-985 LUMEN  
 15W | 10x1.5W 500mA | 2700-3000-4000 KELVIN | 1180-1250-1380 LUMEN  
 20W | 10x2W 700mA | 2700-3000-4000 KELVIN | 1530-1620-1780 LUMEN  
 1505x31mm ↑ 75mm

**24251** ●●●●●●●●●●  
**15 POWER LED WITH LENS | 120cm** length  
 15W | 15x1W 350mA | 2700-3000-4000 KELVIN | 1260-1335-1480 LUMEN  
 22.5W | 15x1.5W 500mA | 2700-3000-4000 KELVIN | 1780-1880-2080 LUMEN  
 30W | 15x2W 700mA | 2700-3000-4000 KELVIN | 2300-2435-2685 LUMEN  
 1205x31mm ↑ 75mm

**24252** ●●●●●●●●●●  
**15 POWER LED WITH LENS | 150cm** length  
 15W | 15x1W 350mA | 2700-3000-4000 KELVIN | 1260-1335-1480 LUMEN  
 22.5W | 15x1.5W 500mA | 2700-3000-4000 KELVIN | 1780-1880-2080 LUMEN  
 30W | 15x2W 700mA | 2700-3000-4000 KELVIN | 2300-2435-2685 LUMEN  
 1505x31mm ↑ 75mm