

Multiline 1 Double Move Cob Led




- > Φωτιστικό χωνευτό οροφής
- > εσωτερικού χώρου
- > με στεφάνι αλουμινίου
- > με ενσωματωμένο 1 σποτ αλουμινίου
- > κινητό οριζοντίως $\pm 35^\circ$ και καθέτως $\pm 35^\circ$
- > με ενσωματωμένο 1 COB LED ισχύος
- > CRI>80 | 3 SDCM
- > κατόπιν παραγγελίας με CRI>90 & CRI 98+
- > σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
- > κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
- > με ανακλαστήρα υψηλής απόδοσης
- > με δέσμη $15^\circ-25^\circ-40^\circ-60^\circ$
- > με ενσωματωμένη ψήκτρα υψηλής απόδοσης
- > για την καλύτερη διαχείριση θερμότητας του led
- > λειτουργεί με συνοδευτικό led driver
- > On/off ή dimmable phase cut / Dali / 1-10volt

- > Recessed spotlight
- > for indoors use
- > with aluminum frame
- > and 1 die cast aluminum spotlight
- > movable horizontally $\pm 35^\circ$ and vertically $\pm 35^\circ$
- > with incorporated 1 COB Led
- > CRI>80 | 3 SDCM | as standard
- > upon request, available with CRI>90 & CRI 98+
- > in 2700-3000-4000 Kelvin
- > upon request in 3500-5000-6500 Kelvin
- > with high performance reflector
- > with high performance heatsink
- > for best thermal management
- > available with $15^\circ-25^\circ-40^\circ-60^\circ$ beam
- > works with remote led driver
- > on/off, dimmable phase cut/Dali/1-10volt

INDICATIVE COB LED TABLE* CRI>80


22142	12.0W	230-240v	2700-3000-4000 KELVIN	1200-1270-1340 LUMEN	⬡ ⬢
22143	17.5W	230-240v	2700-3000-4000 KELVIN	1665-1765-1860 LUMEN	⬡ ⬢
22144	21.0W	230-240v	2700-3000-4000 KELVIN	1960-2080-2190 LUMEN	⬡ ⬢
22145	25.0W	230-240v	2700-3000-4000 KELVIN	2240-2380-2500 LUMEN	⬡ ⬢
22146	28.0W	230-240v	2700-3000-4000 KELVIN	2680-2780-2850 LUMEN	⬡ ⬢
22187	32.0W	230-240v	2700-3000-4000 KELVIN	3025-3150-3265 LUMEN	⬡ ⬢
22188	38.0W	230-240v	2700-3000-4000 KELVIN	3500-3600-3750 LUMEN	⬡ ⬢
22189	42.0W	230-240v	2700-3000-4000 KELVIN	4085-4245-4383 LUMEN	⬡ ⬢
22190	50.0W	230-240v	2700-3000-4000 KELVIN	4785-4975-5142 LUMEN	⬡ ⬢
22191	53.0W	230-240v	2700-3000-4000 KELVIN	4981-5200-5380 LUMEN	⬡ ⬢



Κινητό $\pm 35^\circ$ οριζοντίως
και $\pm 35^\circ$ καθέτως

Movable $\pm 35^\circ$ horizontally
and $\pm 35^\circ$ vertically

181x181mm 158x165mm 125-185mm CE IP20

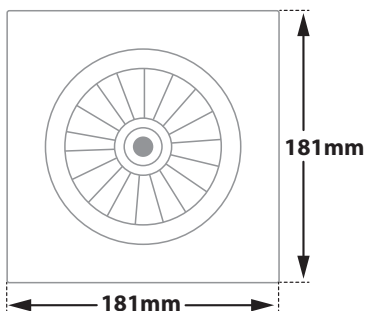

Accessories upon request



Smooth light filter 1

Smooth light filter 2

Honey comb louvre