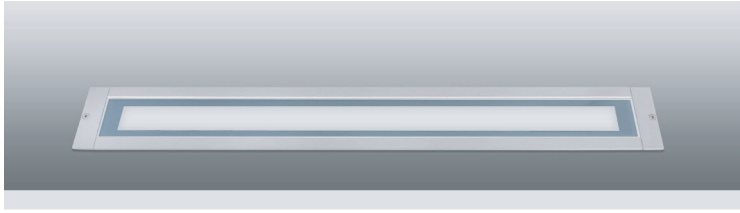


Terra Line Led 6 LLE



- > Linear inground recessed waterproof led luminaire
- > suitable for outdoors use
- > made from extruded anodized aluminum body
- > painted with polyester powder suitable for external use
- > with ground base from aluminum
- > with heavy duty protective glass 10mm thick mat
- > with internal antiglare screen with grilles from aluminum
- > with incorporated linear led smd modules
- > adjusted on high performance linear heatsink
- > for best heat management
- > CRI>80 | 3 SDCM as standard
- > upon request available with CRI>90
- > in 3000-4000 KELVIN
- > also available upon request in 2700-3500-5000-6500 Kelvin
- > 110° beam angle
- > works with built in led driver, on/off as standard
- > upon request dimmable phase cut/Dali/1-10v
- > with silicone gaskets and stainless-steel screws
- > with cable gland PG9 IP68 made from brass
- > upon request is available with pre-connected cable
- > with 1 cable gland PG9 IP68 made from brass as standard
- > or with 2 cable glands PG9 IP68 made from brass
- > for input and output of power supply cables
- > upon request is available with pre-connected cable

CRI 80 | Led source power & Average Luminaire Flux

Indicative Flux list | Final lumen output depends from the selection of the angle beam

30309	10W 220-240v 3000-4000 KELVIN 1040-1100 LUMEN DIM (1)	⏏ ⏏ ⏏
30310	16W 220-240v 3000-4000 KELVIN 1665-1715 LUMEN DIM (2)	⏏ ⏏ ⏏
30311	24W 220-240v 3000-4000 KELVIN 2495-2575 LUMEN DIM (3)	⏏ ⏏ ⏏
30312	34W 220-240v 3000-4000 KELVIN 3535-3645 LUMEN DIM (4)	⏏ ⏏ ⏏

Linear Led Engine/Module

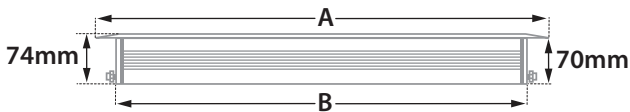


GLASS (10mm)






ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΩΝ DIMENSIONS OF LUMINAIRES				ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΕΩΝ ΕΔΑΦΟΥΣ DIMENSIONS OF GROUND BASES		ΔΙΑΣΤΑΣΕΙΣ ΟΠΗΣ OPENING DIMENSIONS		
DIM	CODE	A	B	C	D	LENGTH	WIDTH	DEPTH
1	30309	349mm	319mm	342mm	426mm	439mm	100mm	110mm
2	30310	645mm	615mm	648mm	732mm	745mm	100mm	110mm
3	30311	945mm	915mm	978mm	1062mm	1075mm	100mm	110mm
4	30312	1245mm	1215mm	1278mm	1362mm	1375mm	100mm	110mm

ΔΙΑΣΤΑΣΕΙΣ ΦΩΤΙΣΤΙΚΟΥ / LUMINAIRE DIMENSIONS



ΔΙΑΣΤΑΣΕΙΣ ΒΑΣΗΣ ΕΔΑΦΟΥΣ / GROUND BASE DIMENSIONS

5339 IP68 RATED MULTI-WAY CONNECTOR BOX
ΣΤΕΓΑΝΟ ΚΟΥΤΙ ΔΙΑΚΛΑΔΩΣΗΣ

ΠΡΟΣΟΧΗ: Σε όλα τα φωτιστικά σώματα χωνευτά δαπέδου κατά την εγκατάσταση θα πρέπει να δημιουργείτε τουλάχιστον 20cm βάθος οπής αποστράγγισης, γεμάτη χαλίκι, για την αποφυγή στάσιμων υδάτων ή να χρησιμοποιείτε για τον ίδιο λόγο αγωγούς αποχέτευσης. Χρησιμοποιείτε μόνο καλώδια τύπου H07RN, άλλου είδους καλώδια μπορεί να μην εξασφαλίζουν βαθμό στεγανότητας IP67 ή IP68.

WARNING: In all ground buried lighting fittings installation, at least 20cm depth drain hole filled by gravel must be made to prevent flooding, or for same reason use draining water pipes. Use H07RN cables only as other types of cables may not be conformed to assure the IP67 or IP 68 rating.

Standard color 18

Available colors upon request 01 02



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

warm 2700 Kelvin warm white 3000 Kelvin neutral white 4000 Kelvin