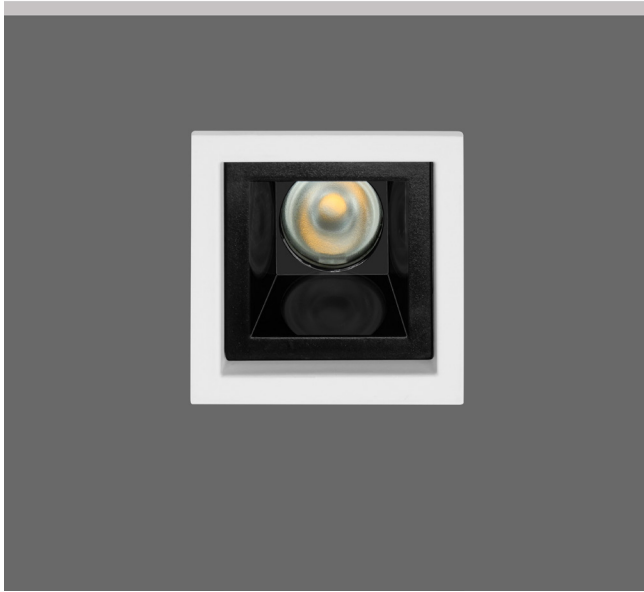




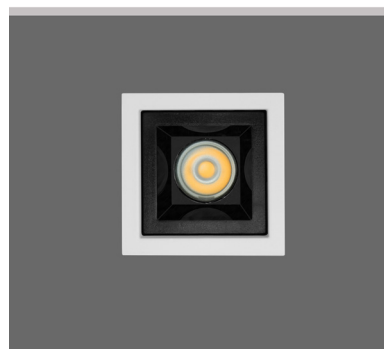
Gemini SQ 52





- Σποτ χωνευτό οροφής
 - εσωτερικού χώρου
 - χυτοπρεσσαριστό αλουμινίου
 - σταθερό
 - με μικρό άνοιγμα σε μαύρο χρώμα
 - ή σε άλλα χρώμα κατόπιν παραγγελίας
 - με ενσωματωμένο 1 Led ισχύος
 - τοποθετημένο βαθιά για μείωση της θάμβωσης
 - κατάλληλο για darklight φωτισμό
 - ενσωματωμένο σε ψήκτρα υψηλής απόδοσης
 - για την καλύτερη διαχείριση θερμότητας του led
 - CRI>80 | 3 SDCM
 - κατόπιν παραγγελίας με CRI>90 & CRI 98+
 - κατόπιν παραγγελίας με 2 SDCM
 - σε θερμοκρασία χρώματος 2700-3000-4000 Kelvin
 - κατόπιν παραγγελίας και σε 3500-5000-6500 Kelvin
 - με φακό υψηλής απόδοσης
 - με δέσμη 15°-25°-40°-60°
 - λειτουργεί με συνοδευτικό led driver, On/off
 - ή κατόπιν παραγγελίας dimmable
 - phase cut / Dali / 1-10volt
- Recessed ceiling led spotlight
 - for indoors use
 - with small external trim
 - from die cast aluminum
 - fixed
 - with small aperture in black color
 - or in other finishes upon request
 - with incorporated 1 Led source
 - positioned deep inside the luminaire
 - for reduce of glare
 - suitable for darklight effect
 - adjusted on a high performance heatsink
 - for best thermal management of led source
 - CRI>80 | 3 SDCM as standard
 - upon request available with CRI>90 & CRI 98+
 - upon request available with 2 SDCM
 - in 2700-3000-4000 Kelvin
 - upon request in 3500-5000-6500 Kelvin
 - with high performance lens
 - available with 15°-25°-40°-60° beam angle
 - works with remote led driver
 - on/off, upon request dimmable phase cut / Dali / 1-10volt


CRI>80 | Led source power & Luminaire Flux


Final lumen output depends on the selection of the angle beam

40098  3.2W | 2700-3000-4000 KELVIN | 230-250-265 LUMEN  40099  4.5W | 2700-3000-4000 KELVIN | 335-355-380 LUMEN  
 52x52mm  48x48mm  70mm  


Fixed

Anti-dazzle
Angle

 Το παραπάνω φωτιστικό προσφέρεται κατόπιν παραγγελίας με μπροστινή προστασία IP44

 The above luminaire is available upon request with IP44 front protection

Accessories upon request

Honey comb
louvreSmooth
FilterElliptical
Filter

01 02 18

Βαμμένα με Ηλεκτροστατική Βαφή
Painted with Electrostatic Powder



*Η τεχνολογία των LED είναι σε διαρκή εξέλιξη οπότε πριν παραγγείλετε, παρακαλούμε επιβεβαιώστε ποιο LED είναι διαθέσιμο LED technology changes constantly forward, so before selecting / ordering the most suitable product for you, ask for a confirmation that this is the most updated product to our list.

 warm 2700 Kelvin  warm white 3000 Kelvin  neutral white 4000 Kelvin